

PULLEY AND TAKE-UP CATALOG

phone: 1-800-437-9074

website: www.superior-ind.com

315 East State Highway 28
Morris, Minnesota 56267, USA

TABLE OF CONTENTS

PULLEYS

- 02** Product Range and Capabilities
- 04** Pulley Part Number System
- 05** Bushing Systems / Hub Design Options
- 06** XT® and QD® Bushing Specs
- 07** Bushing Location Dimensions
- 09** Conveyor Design Data Sheet
- 10** Conveyor Profiles
- 11** Drive Pulley Shaft Detail Worksheet
- 11** Non-Drive Pulley Assembly Details
- 12** Core Systems® Pulley Data Sheet
- 13** Pulley Diameter Selection Chart
- 14** Lagging
- 15** Chevron® Pulley
- 16** Grain Elevator Pulleys
- 16** Core Systems® Design
- 17** Specialized Pulleys

TAKE-UPS

- 19** Conveyor Take-Up Frames
- 20** Telescoping Tube Take-Up
- 21** Wide Slot Take-Up
- 22** Light Duty Take-Up
- 23** Heavy Duty Take-Up
- 24** Top Angle Take-Up
- 25** Center Pull Take-Up
- 26** Take-Up Interchange and Bearing Sizes

APPENDIX

- A-27** Bushing Installation – * XT®
- A-28** Bushing Installation – * QD®
- A-29** Bushing Maintenance and Removal
- A-30** Pulley Stress Contributors
- A-31** Shaft Weights and Ordering Info
- A-32** Shaft Formulas
- A-33** Lagging Weights
- A-34** Bulk Materials and Belt Speeds
- A-35** Volumes of Stockpile Volume Calculator
- A-36** Lift Based on Actual Pulley Center to Center
- A-37** Conveyor Horsepower Information
- A-38** Electrical Information
- A-39** Conveyor Belt Troubleshooting Guide
- A-40** Conveyor Belt Speeds
- A-41** Terms and Conditions

* XT® is a registered trademark of Van Gorp Corp.

* QD® is a registered trademark of Emerson Electric Co.

TABLES AND FIGURES

TABLES


02	1.1 Product Range
06	2.1 XT Keyway Dimensions
06	2.2 QD Keyway Dimensions
07	3.1 XT Bushing Location Dimensions (Drum)
07	3.2 QD Bushing Location Dimensions (Drum)
07	3.3 Taper-Lock® Bushing Location Dimensions (Drum)
07	3.4 SXT Bushing Location Dimensions (Drum)
08	3.5 XT Bushing Location Dimensions (Wing)
08	3.6 QD Bushing Location Dimensions (Wing)
08	3.7 Taper-Lock Bushing Location Dimensions (Wing)
08	3.8 SXT Bushing Location Dimensions (Wing)
13	4.1 Pulley Diameter Selection Chart
13	4.2 Wing Pulley Selection Chart
13	4.3 Wing Pulley Selection Chart
13	4.4 CW-Wrap Factor
14	5.1 Lagging Capability
15	6.1 Chevron® Pulley Specs
20	7.1 TUTT Dimensions
21	7.2 TUWS Dimensions
22	7.3 TULD Dimensions
23	7.4 TUHD Dimensions
23	7.4-A TUHD Bolt Dimensions
24	7.5 TUTA Dimensions
25	7.6 TUCP Dimensions
26	7.7 TUTA Interchange and Bearing Sizes
26	7.8 TUHD Interchange and Bearing Sizes
26	7.9 TULD Interchange and Bearing Sizes
26	7.10 TUCP Interchange and Bearing Sizes
26	7.11 TUWS Interchange and Bearing Sizes
A-27	8.1 Recommended XT Capscrew Torque
A-28	8.2 Recommended QD Capscrew Torque
A-31	9.1 Shaft Weights
A-33	10.1 Crowned Drum Lagging Weights
A-34	11.1 Characteristics of Common Bulk Materials
A-34	11.2 Max Recommended Belt Speeds
A-34	11.3 Suggested Spacing of Troughing Idlers
A-34	11.4 Maximum Belt Capacities
A-35	11.5 Volumes of Conical and Circular Shaped Stockpiles
A-36	11.6 Lift Based on Actual Pulley Center to Center Distance
A-37	11.7 Factor X-HP Required at Headshaft for Empty Conveyor
A-37	11.8 Factor Y-HP Required to Move Material at Any Speed Horizontally
A-37	11.9 Factor Z-HP Required to Lift or Drop Material at Any Speed Vertically
A-38	11.10 Electrical Formulas
A-38	11.11 AC Motor Recommended Wire Size
A-38	11.12 Motor Amps
A-38	11.13 NEMA Electrical Enclosed Types
A-39	11.14 Conveyor Belt Troubleshooting Guide
A-40	11.15 Decimal and Metric Equivalents
A-40	11.16 Conveyor Belt Speeds - Pulley Revolutions
A-40	11.17 Pulley Application Formulas

FIGURES

05	1.1 Class One - Welded Hub
05	1.2 Class Two - Integral Hub
05	1.3 Class Three - Profile Disc
05	1.4 Class Four - Turbine End Disc
05	1.5 Class Five - T-Section
07	2.1 Bushing Location for Drum Pulleys
08	2.2 Bushing Location for Wing Pulleys
11	3.1 Drive Pulley Shaft
11	3.2 Non-Drive Pulley Assembly
20	4.1 TUTT Drawings
21	4.2 TUWS Drawings
22	4.3 TULD Drawings
23	4.4 TUHD Drawings
23	4.4-A TUHD Bearing Bolt Pattern Example
24	4.5 TUTA Drawings
25	4.6 TUCP Drawings
A-27	5.1 Numbered Capscrew Sequence
A-28	5.2 Numbered Capscrew Sequence
A-30	6.1 Stress Contributors
A-30	6.2 Self Weight
A-30	6.3 Drive Weight
A-30	6.4 Belt Tension
A-30	6.5 Bushing Expansion and End Disk Bellows
A-32	7.1 Shaft Deflection
A-34	8.1 Surcharge Angle
A-35	9.1 Volumes of Conical and Circular Shaped Stockpiles
a-36	10.1 Lift (Ft) Based on Actual Pulley Center to Center Distance

PRODUCT RANGE

Table 1.1 Product Range

Description	CEMA Duty	Mine Duty 1.5	Mine Duty 2.0	Super Duty	Core Systems® Design
Wing Pulleys		—			—
Drum Pulleys					
Chevron® Pulley		—			—
Conveyor Type	Light duty, portable	Medium duty	Heavy duty	Extra heavy duty	High tonnage
Belt Style	Fabric	Fabric	Fabric	Fabric	Steel cable or fabric
Belt Burden	Not started under load	Under moderate load	Started under full load	Started under full load	Started under full load
Starts and Stops	Infrequent	Moderate	Frequent	Frequent	Frequent
Load/Feed Characteristics	Uniformly loaded	Uniformly loaded	Non-uniformly loaded	Non-uniformly loaded	Non-uniformly loaded
Design Standards	Load, dimensions and crown defined by ANSI B105.1	Roughly 1.5X service factor of CEMA standard	Roughly 2.0X service factor of CEMA standard	Exceeds 2.0X service factor of CEMA standard	Engineered class, FEA Analysis Design, construction based on belt tension, conveyor load, and belt wrap


CEMA DRUM PULLEYS

- Diameter: 4" to 60"
- Integral Hub Diameter: 12" and under
- Standard Face Widths: 12" to 78"

Part Number Example:

DCEMA-1632CFXT3038C

Style Type Dia. Face Width Face Style Hub Type and Sizes Lagging

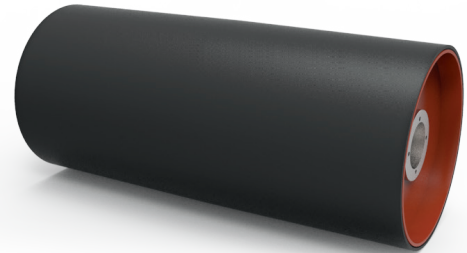


CEMA WING PULLEYS

- Diameter: 6" to 60"
- Contact bar thickness: 1/4" x 1-1/2" minimum, but also offered in 3/8" and 5/8" x 1-1/2"
- Standard Face Widths: 12" to 78"

Part Number Example:

WCEMA-1432CFXT25

Style Type Dia. Face Width Face Style Hub Type and Sizes

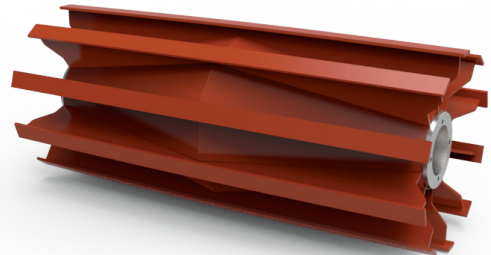


MINE DUTY 1.5 DRUM PULLEYS

- Diameter: 10" to 60"
- Integral Hub Diameter: 12" and under
- Standard Face Widths: 12" to 78"

Part Number Example:

DM15-1838CFXT3538S

Style Type Dia. Face Width Face Style Hub Type and Sizes Lagging

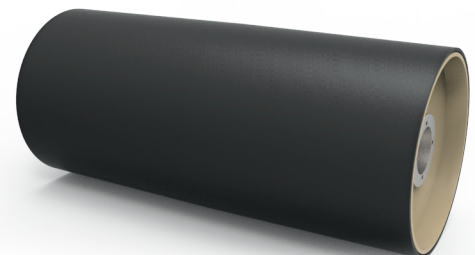

*NOTE: Other diameters and face widths available upon request. Several hub and bushing types are available with all pulleys.

PRODUCT RANGE


MINE DUTY 2.0 DRUM PULLEY

- Diameter: 10" to 60"
- Integral Hub Diameter: 12" and under
- Standard Face Widths: 12" to 102"

Part Number Example:

DM20-2444CFXT5012S

Style Type Dia. Face Width Face Style Hub Type and Sizes Lagging

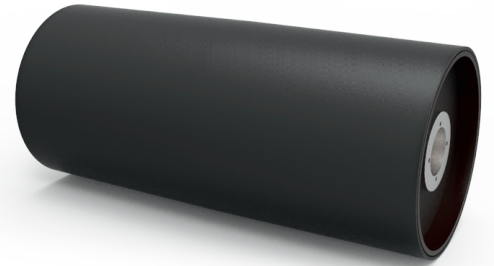

MINE DUTY 2.0 WING PULLEY

- Diameter: 10" to 60"
- Integral Hub Diameter: 12" and under
- Standard Face Widths: 12" to 102"

Part Number Example:

WM20-2044CFXT45

Style Type Dia. Face Width Face Style Hub Type and Sizes




SUPER DRUM PULLEY

- Diameter: 10" to 60"
- Integral Hub Diameter: 12" and under
- Standard Face Widths: 12" to 102"

Part Number Example:

DSUP-3651FFXT8011S

Style Type Dia. Face Width Face Style Hub Type and Sizes Lagging

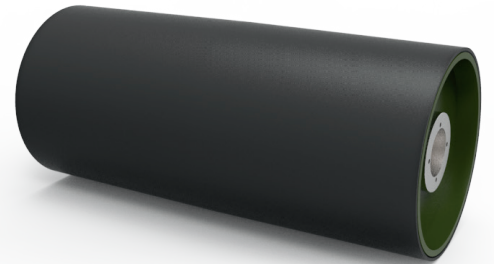


SUPER WING PULLEY

- Diameter: 10" to 60"
- Contact bar thickness: 3/4" x 2" minimum
- Standard Face Widths: 12" to 78"

Part Number Example:

WSUP-3051CFXT60

Style Type Dia. Face Width Face Style Hub Type and Sizes

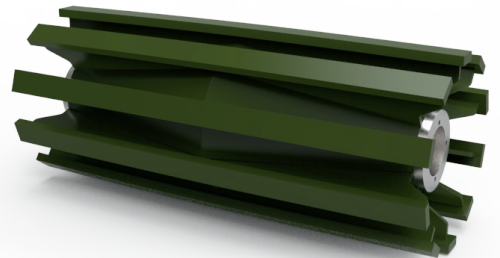


CHEVRON® PULLEY

- Diameter: 10" to 48"
- Contact bar thickness: CEMA: 1" x 1/2" half round bar, Mine/ Super: 1" and 1-1/2" round bar
- Standard Face Widths: 12" to 78"
- Abrasion Resistant Steel Bar upgrade available for Mine and Super Duty
- Integral Hub Diameter: All CEMA Chevron Wing Pulleys

Part Number Example:

CHVS-4275XT70AR

Style Type Dia. Face Width Hub Type and Sizes Abrasion Resistant Steel

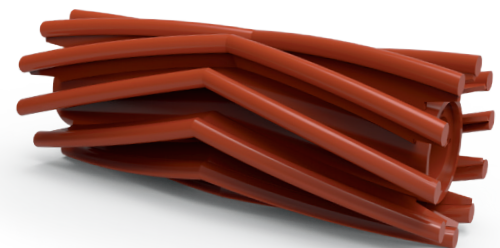

*NOTE: Other diameters and face widths available upon request. Several hub and bushing types are available with all pulleys.

PULLEY PART NUMBER SYSTEM

SAMPLE PART NUMBERS

DM20-3063CFXT5012H-INT or **WCEMA-1638CFXT35**

Pulley Style + **Pulley Type** + Diameter + Face Width + **Face Type** + Hub Type and Bushing Size + Lagging Thickness & Type + **Upgrades**

PULLEY STYLE

D = Drum

W = Wing

CHV = Chevron Wing

PULLEY TYPE

CEMA = CEMA

M15 = Mine Duty 1.5

M20 = Mine Duty 2.0

SUP = Super Duty

C = CEMA Chevron Wing

M = Mine Duty Chevron Wing

S = Super Chevron Wing

ELV = Elevator

DIAMETER

4" to 60" (D) 6" to 60" (W) = CEMA

10" to 60" = M15

10" to 60" (D) 8" to 60" (W) = M20

12" to 60" (D) 12" to 42" (W) = SUP

12" to 42" = M

12" to 42" = S

FACE WIDTH

12" to 78" = CEMA

12" to 78" = M15

12" to 102" = M20

10" to 60" = SUP

26" to 78" = M

26" to 78" = S

FACE TYPE

FF = Flat Face

*CF = Crown Face

*TC = Trapezoid Crown

HUB TYPE

XT = XT

QD = QD

TL = Taper-lock (K)

KLD = Keyless Locking Device

BUSHING SIZE

XT = XT15-XT120

QD = QDSF-QDSS

TL = 2517-10085

KLD = Keyless Locking Device

LAGGING THICKNESS & TYPE

14S = 1/4" Smooth

38C = 3/8" Chevron

38H = 3/8" Herringbone

38D = 3/8" Diamond

38S = 3/8" Smooth

12C = 1/2" Chevron

12H = 1/2" Herringbone

12D = 1/2" Diamond

12S = 1/2" Smooth

58C = 5/8" Chevron

58H = 5/8" Herringbone

58D = 5/8" Diamond

58S = 5/8" Smooth

34C = 3/4" Chevron

34H = 3/4" Herringbone

34D = 3/4" Diamond

34S = 3/4" Smooth

11C = 1" Chevron

11H = 1" Herringbone

11D = 1" Diamond

11S = 1" Smooth

CL = Ceramic Lag

VCL = Vulcanized Ceramic Lag

CSL = Ceramic Slide Lag

SL = Slide Lag

U = Urethane Lag

MSHA = MSHA approved lagging (add after thickness and type)

SPIRAL = Spiral wing or drum pulley

45 = 45 Durometer (add after thickness and type)

Lagging Explanation:

12C
└─ Lagging Type
└─ Denominator
└─ Numerator $\frac{1}{2} = 12$

UPGRADES:

(APPEND TO PART NUMBER)

WINGS

FLAT BAR UPGRADES

38F = 3/8" x 1-1/2" flat bar

58F = 5/8" x 1-1/2" flat bar

34F = 3/4" x 2" flat bar

ROUND BAR UPGRADES

34R = 3/4" Round

10R = 1" Round

112R = 1-1/2" Round

RETAINING RING OPTION

ABRASION RESISTANT

CONTACT BARS

DRUMS

-SS = Stainless Steel

-INT = Integral End Disk Design

* CF = Crown Face equals between 1/16" to 1/8" per foot crown over the full face.

* TC = Trap Crown equals 1/8" taper over 10" of the outside edges.

BUSHING SYSTEMS

XT BUSHINGS

- Designed specifically for pulley applications with 2 hubs
- 2" per foot taper (9.46° angle)
- Bolts equally spaced for uniform draw-up
- Easy removal
- Steep taper requires minimal axial movement of the hub and end disc during installation
- Reduced stress on end disc during installation
- XT bushings up to XT80 have 4-bolt, XT100 and XT120 have 6-bolt flange for clamping bushing to hub



QD BUSHINGS

- Originally designed for single hub applications such as sheaves and sprockets
- ¾" per foot taper (3.58° angle)
- Shallow taper requires more axial movement of hub and end disc during installation
- QD bushing sizes SF to JS have 3-bolt flange for clamping bushing to the hub
- QD bushing sizes MS to WS have 4-bolt flange for clamping bushing to the hub
- QD bushing size SS have 5-bolt flange for clamping bushing to the hub



TAPER-LOCK BUSHING

- Fit flush into taper-lock sprockets and pulleys
- To install, align the bushing and tighten the included set screws to the recommended torque
- Bushings have a 1-11/16" per foot taper (8° angle) and are made of steel



KEYLESS LOCKING DEVICE

- High torque capability
- No keyway stress concentration
- The locking assembly design includes concentric, tapered rings
- As the locking screws are torqued, the locking assembly clamps down on the shaft and expands into the hub bore, establishing a tight mechanical shrink fit



HUB DESIGN OPTIONS




figure 1.1

CLASS ONE: WELDED HUB

- Best value in applications where high tension is not the chief concern.




figure 1.2

CLASS TWO: INTEGRAL HUB

- One piece machined integral end disc.
- Eliminates two welds of hub to end disc, a common fatigue point.
- Optimized for XT bushings, others available upon request.




figure 1.3

CLASS THREE: PROFILE DISC

- Solid profiled end disc.
- Machined one side reduces stress and eliminates hub to end disc welds.
- Designed for Keyless Locking Devices.
- Stress free assembly without damaging effect of keyways.




figure 1.4

CLASS FOUR: TURBINE END DISC

- One piece solid end disc.
- Machined on both sides to resemble true turbine/hourglass shape.
- Minimizes stress.
- Meets customer specific load and tensions.
- Works with various Keyless Locking Devices.




figure 1.5

CLASS FIVE: T-SECTION

- Solid end discs.
- Machined to eliminate welds on end disc.
- Joins with butt welds and rim to form "T" cross section.
- Meets customer specific load and tensions.
- Fabric and steel cable belts over 2500 PIW
- Designed for use with heaviest series of Keyless Locking Devices.

XT AND QD BUSHING SPECS

Table 2.1 XT KEYWAY DIMENSIONS

BUSHING	BORE	BUSHING KEYWAY	SHAFT KEYWAY	*WEIGHT
XT15	5/8 – 7/8	3/16 X 3/32	3/16 X 3/32	1.1
	15/16 – 1-1/4	1/4 X 1/8	1/4 X 1/8	1.1
	1/5/16 – 1-3/8	5/16 X 5/32	5/16 X 5/32	1.1
	1-7/16 – 1-1/2	3/8 X 1/8	3/8 X 3/16	1.1
XT20	3/4 – 7/8	3/16 X 3/32	3/16 X 3/32	2.1
	15/16 – 1-1/4	1/4 X 1/8	1/4 X 1/8	2.1
	1-5/16 – 1-3/8	5/16 X 5/32	5/16 X 5/32	2.1
	17/16 – 1-3/4	3/8 X 3/16	3/8 X 3/16	2.1
	1-13/16 – 2	1/2 X 3/16	1/2 X 1/4	2.1
XT25	1 – 1-1/4	1/4 X 1/8	1/4 X 1/8	3.5
	1-5/16 – 1-3/8	5/16 X 5/32	5/16 X 5/32	3.5
	1-7/16 – 1-3/4	3/8 X 3/16	3/8 X 3/16	3.5
	1-13/16 – 2-1/4	1/2 X 1/4	1/2 X 1/4	3.5
	2-5/16 – 2-1/2	5/8 X 1/8	5/8 X 5/16	3.5
XT30	1-7/16 – 1-3/4	3/8 X 3/16	3/8 X 3/16	6.2
	1-13/16 – 2-1/4	1/2 X 1/4	1/2 X 1/4	6.2
	2-5/16 – 2-3/4	5/8 X 5/16	5/8 X 5/16	6.2
	2-13/16	3/4 X 3/8	3/4 X 3/8	6.2
	2-7/8 – 3	3/4 X 3/16	3/4 X 3/8	6.2
XT35	1-15/16 – 2-1/4	1/2 X 1/4	1/2 X 1/4	10.4
	2-5/16 – 2-3/4	5/8 X 5/16	5/8 X 5/16	10.4
	2-13/16 – 3-1/4	3/4 X 3/8	3/4 X 3/8	10.4
	3-5/16 – 3-3/8	7/8 X 7/16	7/8 X 7/16	10.4
	3-7/16 – 3-1/2	7/8 X 5/16	7/8 X 7/16	10.4
XT40	2-7/16 – 2-3/4	5/8 X 5/16	5/8 X 5/16	13.3
	2-13/16 – 3-1/4	3/4 X 3/8	3/4 X 3/8	13.3
	3-5/16 – 3-3/4	7/8 X 7/16	7/8 X 7/16	13.3
	3-13/16	1 X 1/2	1 X 1/2	13.3
	3-7/8 – 4	1 X 3/8	1 X 1/2	13.3
XT45	3-7/16 – 3-3/4	7/8 X 7/16	7/8 X 7/16	18.5
	3-13/16 – 4-5/16	1 X 1/2	1 X 1/2	18.5
	4-3/8 – 4-1/2	1 X 3/8	1 X 1/2	18.5
XT50	3-15/16 – 4-1/2	1 X 1/2	1 X 1/2	35.5
	4-9/16 – 5	1-1/4 X 5/8	1-1/4 X 5/8	35.5
XT60	4-15/16 – 5-1/2	1-1/4 X 5/8	1-1/4 X 5/8	48
	5-9/16 – 6	1-1/2 X 3/4	1-1/2 X 3/4	48
XT70	5-5/16 – 5-1/2	1-1/4 X 5/8	1-1/4 X 5/8	74.6
	5-9/16 - 6-1/2	1-1/2 X 3/4	1-1/2 X 3/4	74.6
	6-9/16 - 7	1-3/4 X 3/4	1-3/4 X 3/4	74.6
XT80	6-15/16 – 7-1/2	1-3/4 X 3/4	1-3/4 X 3/4	96.6
	7-9/16 – 8	2 X 3/4	2 X 3/4	96.6
XT100	8-1/2, 9	2 X 3/4	2 3/4	146
	9-7/16, 9-1/2, 10	2-1/2 X 7/8	2-1/2 X 7/8	146
XT120	10-1/2, 11	2-1/2 X 7/8	2-1/2 X 7/8	216
	11-1/2, 12	3 X 1	3 X 1	216

Table 2.2 QD Keyway Dimensions

BUSHING	BORE	BUSHING KEYWAY	SHAFT KEYWAY	*WEIGHT
SF	1/2 – 9/16	1/8 X 1/16	1/8 X 1/16	4
	5/8 – 7/8	3/16 X 3/32	3/16 X 3/32	4
	15/16 – 1-1/4	1/4 X 1/8	1/4 X 1/8	4
	1-5/16 – 1-3/8	5/16 X 5/32	5/16 X 5/32	4
	1-7/16 – 1-1-3/4	3/8 X 3/16	3/8 X 3/16	4
	1-13/16 – 2-1/4	1/2 X 1/4	1/2 X 1/4	4
	2-5/16	5/8 X 5/16	5/8 X 5/16	4
E	2-3/8 – 2-1/2	5/8 X 3/16	5/8 X 5/16	4
	1 – 1-3/8	5/16 X 5/32	5/16 X 5/32	8.7
	1-7/16 – 1-3/4	3/8 X 3/16	3/8 X 3/16	8.7
	1-13/16 – 2-1/4	1/2 X 1/4	1/2 X 1/4	8.7
	2-5/16 – 2-3/4	5/8 X 5/16	5/8 X 5/16	8.7
	2-13/16 – 2-7/8	3/4 X 3/8	3/4 X 3/8	8.7
	2-15/16	3/4 X 1/8	3/4 X 3/8	8.7
F	1-13/16 – 2-1/4	1/2 X 1/4	1/2 X 1/4	13
	2-5/16 – 2-3/4	5/8 X 5/16	5/8 X 5/16	13
	2-13/16 – 3-1/4	3/4 X 3/8	3/4 X 3/8	13
	3-5/16 – 3-7/16	7/8 X 3/16	7/8 X 7/16	13
JS	2-13/16 – 3-1/4	3/4 X 3/8	3/4 X 3/8	17.8
	3-5/16 – 3-3/4	7/8 X 7/16	7/8 X 7/16	17.8
	3-13/16	1 X 1/8	1 X 1/2	17.8
	3-7/8 – 4	1 X 1/8	1 X 1/2	17.8
MS	2-13/16 – 3-1/4	3/4 X 3/8	3/4 X 3/8	44.2
	3-5/16 – 3-3/4	7/8 X 7/16	7/8 X 7/16	44.2
	3-13/16 – 4-9/16	1 X 1/2	1 X 1/2	44.2
	4-11/16 – 4-3/4	1-1/4 X 5/8	1-1/4 X 5/8	44.2
NS	3-5/16 – 3-3/4	7/8 X 7/16	7/8 X 7/16	52.7
	3-13/16 – 4-1/2	1 X 1/2	1 X 1/2	52.7
	4-3/4 – 5-1/2	1-1/4 X 5/8	1-1/4 X 5/8	52.7
PS	3-15/16 – 4-1/2	1 X 1/2	1 X 1/2	84.1
	4-3/4 – 5-1/2	1-1/4 X 5/8	1-1/4 X 5/8	84.1
	5-15/16	1-1/2 X 3/4	1-1/2 X 3/4	84.1
WS	5-3/4 – 6-1/2	1-1/2 X 3/4	1-1/2 X 3/4	183
	7 – 7-1/2	1-3/4 X 3/4	1-3/4 X 3/4	183
	8	2 X 1/4	2 X 3/4	183

*Bushing weights are estimates only. Actual weights could vary from those listed.

BUSHING LOCATION DIMENSIONS

DRUM PULLEYS

- A. End of pulley to face of bushing
B. Length through hub and bushing
C. Clearance required to remove bushing



FIGURE 2.1 Bushing location for drum pulleys

Table 3.1 XT Bushing Location dimensions

HUB	DIMENSIONS			BUSHING	MAX. BORE	SCREW TORQUE (IN-LBS)
	A	B	C			
XT15	5/32	1-1/8	13/16	XT15	1-1/2	96
XT20	7/16	1-13/32	1-1/8	XT20	2	204
XT25	1/2	1 7/8	1-9/16	XT25	2-1/2	360
XT30	1/2	2-1/16	1-3/8	XT30	3	540
XT35	9/16	2-15/32	1-9/16	XT35	3-1/2	840
XT40	5/8	2-13/16	1-13/16	XT40	4	1,200
XT45	11/16	3-5/16	2	XT45	4-1/2	1,680
XT50	13/16	3-3/4	2-1/4	XT50	5	3,000
XT60	7/8	4-1/8	2-1/4	XT60	6	4,800
XT70	1	4-11/16	2-3/4	XT70	7	7,200
XT80	1-1/8	5-1/8	3-3/16	XT80	8	9,000
XT100	1-1/8	6-3/16	3-3/4	XT100	10	9,000
XT120	1-1/8	7-1/16	3-3/4	XT120	12	9,000

Table 3.2 QD Bushing Location dimensions

HUB	DIMENSIONS			BUSHING	MAX. BORE	SCREW TORQUE (IN-LBS)
	A	B	C			
QDSF	5/8	2-1/16	1-5/8	SF	2-1/2	360
QDE	5/8	2-3/4	1-7/8	DE	2-15/16	720
QDF	1/2	3-3/4	3-5/16	F	3-7/16	904
QDJS	3/4	4-5/8	2-3/16	JS	4	1,620
QDMS	2-7/16	6-3/4	1-7/8	MS	4-3/4	2,700
QDNS	1-7/8	8-1/8	3-3/16	NS	5-1/4	3,600
QDPS	2-7/16	9-3/8	3-3/16	PS	6-1/4	5,400
QDWS	2-9/16	11-3/8	3-3/4	WS	8-1/8	7,200
QDSS	1-5/8	8-3/4	4-1/16	SS	10	9,000

Table 3.4 SXT Bushing location dimensions

HUB	DIMENSIONS			BUSHING	MAX. BORE	SCREW TORQUE (IN-LBS)
	A	B	C			
SXT25	1/16	3-1/2	2	XT25	2-1/2	360
SXT30	1/8	3-9/16	1-3/4	XT30	3	540
SXT35	1/4	3-25/32	1-7/8	XT35	3-1/2	840
SXT40	3/8	3-13/16	2-1/16	XT40	4	1200
SXT45	9/16	3-15/16	2-1/8	XT45	4-1/2	1680
SXT50	13/16	4	2-1/4	XT50	5	3000
SXT60	15/16	4-1/8	2-3/16	XT60	6	4800

Table 3.3 TAPER-LOCK Bushing Location dimensions

HUB	DIMENSIONS			BUSHING	MAX. BORE	SCREW TORQUE (IN-LBS)
	A	B	C			
K25	3/4	1-3/4	7/8	2517	2-1/2	430
F25	3/4	1-3/4	7/8	2517	2-1/2	430
F30	3/4	2	1-5/16	3020	3	800
K35	3/4	3-1/2	1-15/16	3535	3-1/2	1,000
K40	3/4	4	2-5/8	4040	4	1,700
K45	3/4	4-1/2	3-5/16	4545	4-1/2	2,450
K50	3/4	5	4-1/16	5050	5	3,100
K60	2	5	2-3/8	6050	6	7,820
K70	2	6	2-3/8	7060	7	7,820
K80	2	6-1/2	2-3/8	8065	8	7,820
K100	2	8-1/2	3-3/8	10085	10	13,700

*Note: To find XT and QD bushing installation instructions, please refer to the Appendix, page A-27 and A-28, respectively.

BUSHING LOCATION DIMENSIONS

WING PULLEYS

- A. End of pulley to face of bushing
B. Length through hub and bushing
C. Clearance required to remove bushing

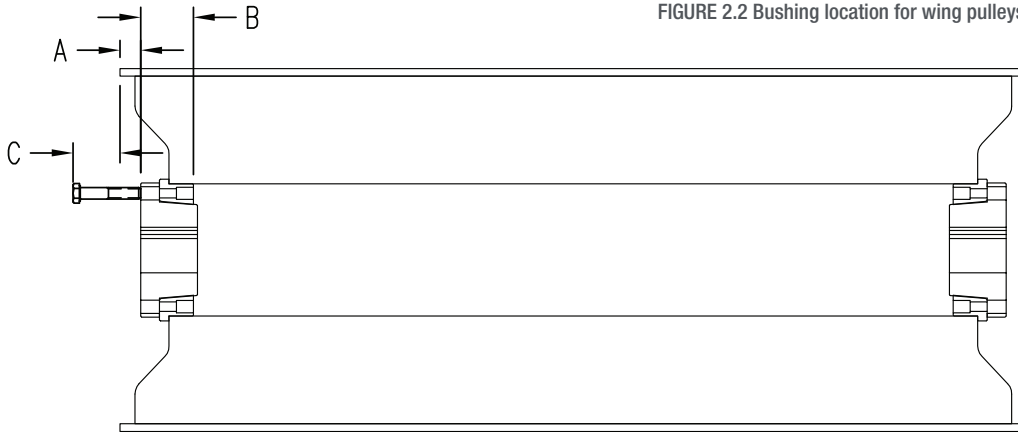


FIGURE 2.2 Bushing location for wing pulleys

Table 3.5 XT Bushing Location dimensions

HUB	DIMENSIONS			BUSHING	MAX. BORE	SCREW TORQUE (IN-LBS)
	A	B	C			
XT15	5/32	1-1/8	13/16	XT15	1-1/2	96
XT20	7/16	1-13/32	1-1/8	XT20	2	204
XT25	1/2	1-7/8	1-9/16	XT25	2-1/2	360
XT30	1/2	2-1/16	1-3/8	XT30	3	540
XT35	9/16	2-15/32	1-9/16	XT35	3-1/2	840
XT40	5/8	2-13/16	1-13/16	XT40	4	1200
XT45	11/16	3-5/16	2	XT45	4-1/2	1680
XT50	13/16	3-3/4	2-1/4	XT50	5	3000
XT60	7/8	4-1/8	2-1/4	XT60	6	4800
XT70	1	4-11/16	2-3/4	XT70	7	7200
XT80	1-1/8	5-1/8	3-3/16	XT80	8	9000
XT100	1-1/8	6-3/16	3-3/4	XT100	10	9000
XT120	1-1/8	7-1/16	3-3/4	XT120	12	9000

Table 3.6 QD Bushing Location dimensions

HUB	DIMENSIONS			BUSHING	MAX. BORE	SCREW TORQUE (IN-LBS)
	A	B	C			
QDSF	5/8	2-1/16	1-5/8	SF	2-1/2	360
QDE	5/8	2-3/4	1-7/8	E	2-15/16	720
QDF	1/2	3-3/4	3-5/16	F	3-7/16	904
QDJS	3/4	4-5/8	2-3/16	JS	4	1620
QDMS	2-7/16	6-3/4	1-7/8	MS	4-3/4	2700
QDNS	1-7/8	8-1/8	3-3/16	NS	5-1/4	3600
QDPS	2-7/16	9-3/8	3-3/16	PS	6-1/4	5400
QDWS	2-9/16	11-3/8	3-3/4	WS	8-1/8	7200
QDSS	1-5/8	8-3/4	4-1/16	SS	10	9000

Table 3.8 SXT Bushing location dimensions

HUB	DIMENSIONS			BUSHING	MAX. BORE	SCREW TORQUE (IN-LBS)
	A	B	C			
SXT25	1/16	3-1/2	2	XT25	2-1/2	360
SXT30	1/8	3-9/16	1-3/4	XT30	3	540
SXT35	1/4	3-25/32	1-7/8	XT35	3-1/2	840
SXT40	3/8	3-13/16	2-1/16	XT40	4	1200
SXT45	9/16	3-15/16	2-1/8	XT45	4-1/2	1680
SXT50	13/16	4	2-1/4	XT50	5	3000
SXT60	15/16	4-1/8	2-3/16	XT60	6	4800

Table 3.7 TAPER-LOCK Bushing Location dimensions

HUB	DIMENSIONS			BUSHING	MAX. BORE	SCREW TORQUE (IN-LBS)
	A	B	C			
W16	1-5/8	1-1/2	1/8	1615	2-1/2	430
W25	1-1/2	1-3/4	9/16	2517	2-1/2	430
K30	1-3/4	2	7/8	3020	3	800
K35	2-3/4	3-1/2	5/8	3535	3-1/2	1000
K40	2-3/4	4	1-3/8	4040	4	1700
K45	2-5/8	4-1/2	2	4545	4-1/2	2450
K50	3-3/8	5	1-5/8	5050	5	3100

*Note: To find XT and QD bushing installation instructions, please refer to the Appendix, page A-27 and A-29, respectively.

CONVEYORS DESIGN DATA SHEET

COMPLETE THIS FORM FOR A CUSTOMIZED CONVEYOR SYSTEM / PULLEY QUOTATION

coresystems@superior-ind.com
Toll Free – 800-321-1558
Fax – 320-589-3892

BOLDED LINES INDICATE MINIMUM REQUIRED INFORMATION NECESSARY FOR PROCESSING

Date _____ Submitted By _____
Customer _____ Contact Name _____
Plant/Mine/Project _____ Contact Phone or Email _____

APPLICATION DATA


Operation (hours/day) _____ Ambient Temp Range (degrees) _____
Operation (days/year) _____ Altitude (ft) _____

CONVEYOR DATA


Conveyor Name/Tag _____ **Material (type & max lump size)** _____
Belt Width (in) _____ **Material Density (lbs/ft³)** _____
Bearing Centers (in) _____ Material Repose Angle (degrees) _____
Conveyor C/C Length (ft) _____ Surcharge Angle (degrees) _____
Conveyor Lift (ft) or Incline (deg) _____ **Number of Belt Scrapers/Cleaners** _____
[if not linear, please sketch curve below]
Conveyor Capacity (sTPH) _____ Number of Belt Plows _____
Belt Speed (FPM) _____ Top Side Idler Spacing _____
Motor Horsepower (if known) _____ Trough Idler Angle & Roll Diameter _____
Take-Up Type (manual or automatic) _____ Return Idler Angle, Spacing & Roll Diameter _____
Total Installed Counterweight (lbs) _____ Length of Skirtboards (ft) _____
Brake or Demand HP (if known) _____ Height of Material on Skirts (in) _____
Motor Voltage _____ Conveyor Belt Details (if known) _____
Motor Hertz _____ Fabric or Steel Cord _____
Type of Soft Start _____ Number of Plies & PIW (if known) _____
(Electronic; VFD; Fluid Coupling; or none) _____ Covers Top x Bottom (in x in) _____

DRIVE STYLE (IF KNOWN)

Right Angle (circle one) _____ Yes / No
Shaft Mounted (circle one) _____ Yes / No
Parallel (circle one) _____ Yes / No
Concentric inline (circle one) _____ Yes / No
Output RPM= Pulley RPM _____
Selected Pulley Diameter _____
Shaft Diameter Through Bearing _____
Input Connection (circle one below) _____
↳ V-Belt / C/D Flange / Coupling
Connection to Pulley (circle one below) _____
↳ Direct Coupled / Shaft Mount / Chain or Belt Final

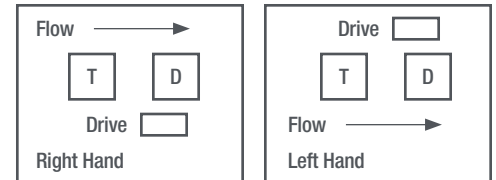

CONVEYOR PROFILE (SEE TYPES 1-10 BELOW) CIRCLE ONE.

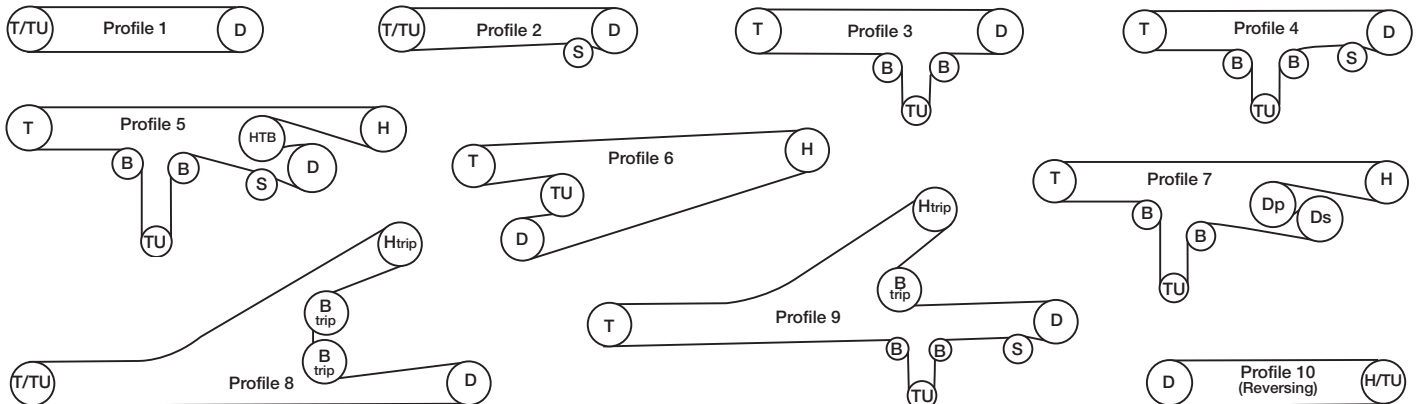

If profile differs from one shown, please sketch here:

CONVEYOR PROFILES

PROFILE 1

Type = Head/Drive with Manual/Screw Take-Up



- Drive location = head/discharge
- Takeup location = manual at tail
- Drive snub = no

PROFILE 2


Type = Head/Drive with Snub and Manual/Screw Take-Up



- Drive location = head/discharge
- Takeup location = manual at tail
- Drive snub = yes

PROFILE 3


Type = Head/Drive with Automatic/Gravity Take-Up



- Drive location = head/discharge
- Takeup location = automatic on return
- Drive snub = no

PROFILE 4


Type = Head/Drive with Snub and Automatic/Gravity Take-Up



- Drive location = head/discharge
- Takeup location = automatic on return
- Drive snub = yes

PROFILE 5


Type = Wrap Drive (on return) with Snub and HT Bend and Automatic/Gravity Take-Up

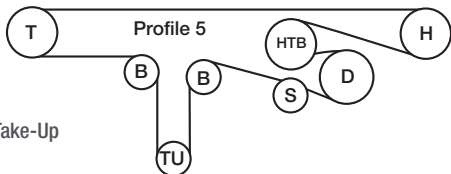

- Drive location = wrap on return
- Takeup location = gravity on return
- Drive snub = yes

PROFILE 6


Type = Wrap Drive (on return) with Manual/Screw Take-Up

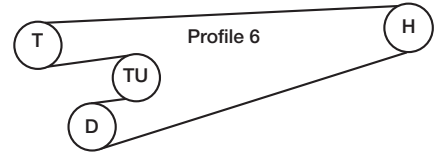

- Drive location = wrap on return
- Takeup location = manual on return
- Drive snub = no

PROFILE 7


Type = Primary and Secondary Wrap Drives (on return) and Automatic Take-Up (commonly called "S" or "Z" Drives - as used in underground mining conveyors)

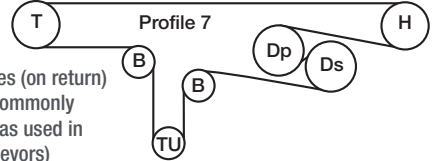

- Drive location = (2) primary and secondary wrap on return
- Takeup location = automatic on return
- Drive snub = no

PROFILE 8


Type = Tripper with Head/Drive and Manual/Screw Take-Up

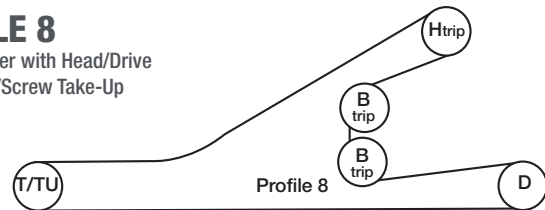

- Drive location = head/discharge
- Takeup location = manual on tail
- Drive snub = no as shown (but could be yes)

PROFILE 9

Type = Tripper with Head/Drive and Automatic/Gravity Take-Up

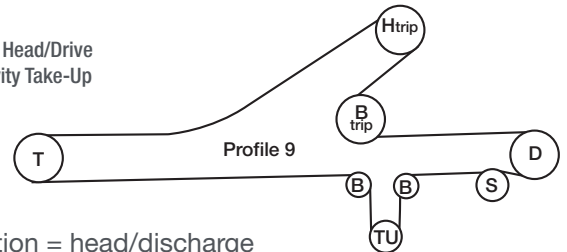

- Drive location = head/discharge
- Takeup location = automatic on return
- Drive snub = yes as shown (but could be no)

PROFILE 10

Type = Reversing/Tail Drive




- Drive location = tail
- Takeup location = manual at head
- Drive snub = no as shown (but could be yes)

NOTE: For Horizontal applications only (no lift/incline).

DRIVE PULLEY SHAFT DETAIL WORKSHEET


Figure 3.1

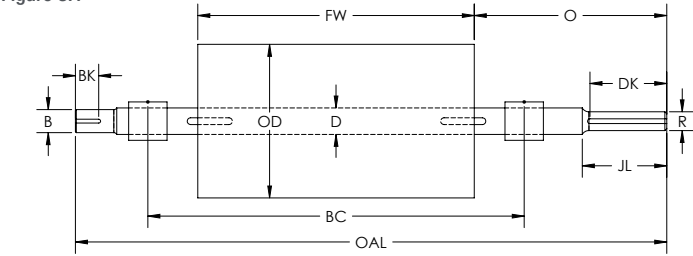

Pulley Identification	Pulley Keyseat Size
Belt Width	Shaft Material
Pulley Diameter Dimension OD	Major Shaft Diameter Dimension D
Pulley Face Width Dimension FW	Overall Shaft Length Dimension OAL
Crown Face or Flat Face	Shaft Diameter at Hubs
Hub Type	Shaft Diameter at Bearings
Lagging Thickness & Type	Shaft Diameter at Reducer Dimension R
Drive Side (Right or Left) [Standing at Tail Looking to Head]	Drive Key Size x Length Dimension DK
Pulley Offset Dimension O	Reducer Journal Length Dimension JL
Number of Keyseats	Shaft Diameter at Backstop Dimension B
	Key Size x Length Dimension BK
	Bearing Centers Dimension BC
	Bearing Type
	Shaft Drill and Tap (Size & Qty)

NON-DRIVE PULLEY ASSEMBLY DETAILS

Figure 3.2

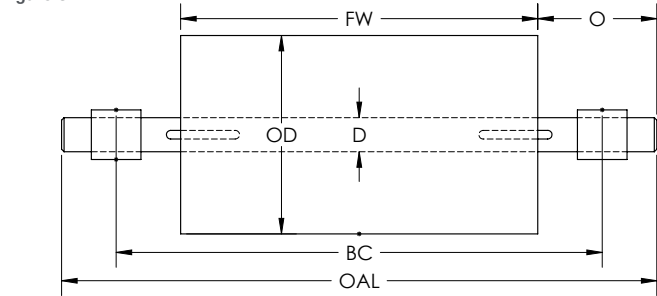

Pulley Identification	Pulley Offset Dimension O
Belt Width	Shaft Material
Drum Pulley or Wing Pulley	Major Shaft Diameter Dimension D
Pulley Diameter Dimension OD	Overall Shaft Length Dimension OAL
Pulley Face Width Dimension FW	Number of Keyseats
Crown Face or Flat Face	Keyseat Size
Hub Type	Shaft Material
Lagging Thickness and Type	Shaft Diameter at Hubs
	Shaft Diameter at Bearings
	Shaft Diameter on Ends (if stub shaft)
	Bearing Centers Dimension BC
	Bearing Type
	Shaft Drill and Tap (Size & Qty)

CORE SYSTEMS® PULLEY DATA SHEET

COMPLETE THIS FORM FOR A CUSTOMIZED CORE SYSTEM PULLEY QUOTATION

coresystems@superior-ind.com

Toll Free – 800-321-1558

Fax – 320-589-3892

Company Name _____ Date _____ By _____

Location _____

Project _____

Conveyor Information _____






Belt: Steel ☐ Fabric ☐ Other _____ Belt Width (inches) _____

Take Up: Screw ☐ Gravity ☐ Hyd. ☐ Other _____

Drive Motor: HP _____ Belt Speed _____

FPM Capacity _____ TPH _____

Center to Center Distance _____ Lift in Feet _____

PULLEY INFO	1	2	3	4
Conveyor Identification				
Pulley Location (Drive, Tail, Snub, etc.)				
Pulley Quantity				
Pulley Type (Drum or Wing)				
Diameter X Face				
Crown or Straight				
Hub Type and Size				
Lagging-Type of Grooves				
Lagging Thickness				
Shaft Diameter through Pulley				
Shaft Diameter through Bearing				
Shaft Diameter at Drive				
Shaft Length				
Number of Keyseats				
Drive Type (Sprocket, Coupling, Shaft Mount Reducer, etc.)				
Bearing Centers				
<div> <div> <div>Arc of Contact _____ °</div> <div>T₁ _____ Lbs.</div> <div>T₂ _____ Lbs.</div> </div> <div> <div>Wrap Angles</div>  </div> </div>				

PULLEY DIAMETER SELECTION CHART

DRUM PULLEY SELECTION CHART: MAXIMUM BELT TENSION (POUNDS PER INCH OF WIDTH)

Table 4.1

ARC OF CONTACT	PULLEY DIAMETER (INCHES)													
	8	10	12	14	16	18	20	24	30	36	42	48	54	60
10°	65	80	95	120	145	175	205	260	345	430	520	605	690	775
20°	50	60	75	95	115	135	160	200	265	335	400	465	535	600
30°	45	55	65	80	100	115	140	175	230	290	345	405	460	520
40°	35	45	55	70	85	100	120	150	200	245	295	345	395	445
50°	30	40	45	60	70	85	100	130	170	215	255	300	340	385
60°	30	40	45	60	70	85	100	125	165	205	250	290	330	375
70°	30	40	50	60	75	85	105	130	175	220	260	305	350	395
80°	35	45	50	65	80	95	115	140	190	235	285	330	375	425
90°	35	45	55	70	85	100	120	150	200	255	305	355	405	455
100°	40	50	60	75	90	110	130	160	215	270	325	380	430	485
110°	45	55	65	80	100	115	140	175	230	290	345	405	460	520
120°	45	55	65	85	105	120	145	185	245	305	365	425	490	550
130°	50	60	75	95	115	135	160	200	265	335	400	465	535	600
140°	55	70	80	105	125	150	180	225	300	375	450	525	600	675
150°	60	75	90	115	140	170	200	250	335	420	505	590	670	755
160°	70	85	100	130	160	185	225	280	375	465	560	650	745	840
170°	75	95	115	145	175	205	250	310	415	520	620	725	830	930
180°	85	105	125	160	195	230	275	345	460	575	690	805	920	1035
190°	75	95	115	145	175	205	250	310	415	520	620	725	830	930
200°	70	85	100	130	160	185	225	280	375	465	560	650	745	840
210°	60	75	90	115	140	170	200	250	335	420	505	590	670	755
220°	55	70	80	105	125	150	180	225	300	375	450	525	600	675
230°	50	60	75	95	115	135	160	200	265	335	400	465	535	600
240°	45	55	65	85	105	120	145	185	245	305	365	425	490	550

WING PULLEY SELECTION CHART: MAXIMUM BELT TENSION (POUNDS PER INCH OF WIDTH)

Table 4.2

DIAMETER	PIW
8"	80
10"	100
12"	120
14"	140
16"	160

Table 4.3

DIAMETER	PIW
18"	180
20"	200
24"	240
30"	280
36"	350

CW: WRAP FACTOR

Table 4.4

TYPE OF DRIVE	ARC OF CONTACT WRAP	AUTOMATIC TAKE-UP		MANUAL TAKE-UP	
		BARE	LAGGED	BARE	LAGGED
Plain	180°	0.84	0.50	1.2	0.8
	200°	0.72	0.42	1.0	0.7
	210°	0.66	0.38	1.0	0.7
	220°	0.62	0.35	0.9	0.6
	240°	0.54	0.30	0.8	0.6
Dual Or Tandem	380°	0.23	0.11	0.5	0.3
	420°	0.18	0.08	—	—

LAGGING

INCREASES TRACTION BETWEEN PULLEY AND BELT

MINIMIZES WEAR TO PULLEY CAUSED BY MATERIAL ABRASION


LAGGING PROMOTES CLEANING, SHEDS FUGITIVE MATERIAL

SUPERIOR VULCANIZED LAGGING PROVIDES MAXIMUM ADHESION TO THE PULLEY

MSHA APPROVED LAGGING AVAILABLE

DIDN'T SEE WHAT YOU NEED?

- Other thicknesses available on request
- Cold Bond rubber lagging available on request
- Neoprene and other lagging styles available on request

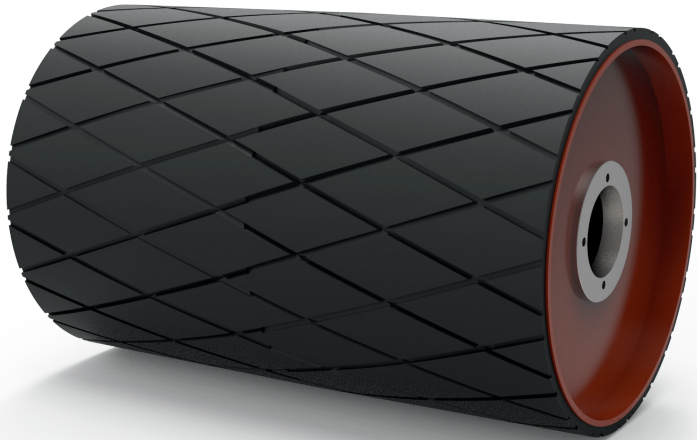

WELD-ON
(REPLACEABLE)
CERAMIC
SLIDE-LAG

Table 5.1 Lagging Capability

LAGGING STYLE	COMPOUND	DUROMETER	THICKNESS (IN)	PRIMARY APPLICATIONS
Chevron	SBR, SAR, MSHA	45, 60	3/8, 1/2, 5/8, 3/4, 1	Drive Pulleys, HT Pulleys, Cleans in one direction
Herringbone	SBR, SAR, MSHA	45, 60	3/8, 1/2, 5/8, 3/4, 1	Drive Pulleys, HT Pulleys, Cleans in one direction
Diamond	SBR, SAR, MSHA	45, 60	3/8, 1/2, 5/8, 3/4, 1	Drive Pulleys, HT Pulleys, Cleans in both directions
Smooth	SBR, SAR, Urethane, MSHA	45, 60	3/8, 1/2, 5/8, 3/4, 1	T ₂ Pulleys, bottom side of the belt (bend, snub)
Slide Lag	SBR, SOF, Husky	45, 60	9/16, 3/4	Drive Pulleys, Head Pulleys
Ceramic	SBR, MSHA		Based on application	High Tension, High HP Drives
Urethane	Urethane	80, 90	Based on application	Bend Pulleys, Wing Lag



CHEVRON



HERRINGBONE



DIAMOND



SMOOTH



SLIDE LAG®



RICHWOOD CERAMICS



ASGCO ARROWHEAD CERAMIC



URETHANE

CHEVRON® PULLEY

DISPELLING MATERIAL

- Chevron pulleys are V-shaped to deflect material from becoming entrapped better than standard wings.

REDUCED WING BENDING

- The V-shaped wings deflect fugitive material out and away, making it difficult to get rocks wedged between wings and belt causing wing tipping and belt damage.

EXTENDS LIFE OF CONVEYOR BELT

- Less material entrapment that punctures belt.
- Significantly reduced beating action due to the Chevron pulley's wings being in constant contact with the belt.
- Testing provided by Fenner Dunlop®.

QUIET

- A standard wing pulley averages 120 dB while the Chevron pulley is only 70 dB. The difference is comparable of a jet engine to a vacuum.

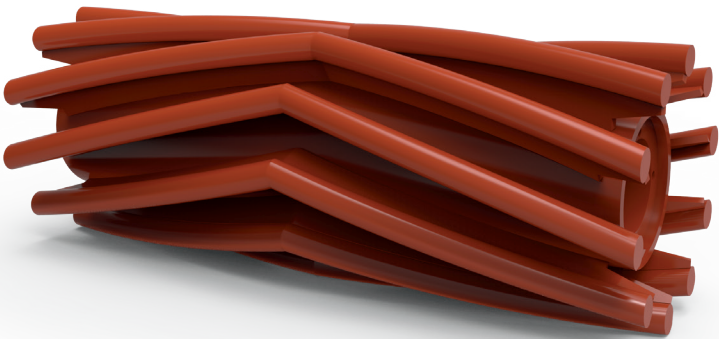


Table 6.1 Chevron pulley specs

	CEMA DUTY	MINE DUTY	SUPER DUTY
Wear Bar Thickness	1" x 1/2" Half Round Bar	1" Round Bar*	1-1/2" Round Bar*
Wing Height	Not Defined	Varies with Diameter	Varies with Diameter
Wing Thickness	3/16" or 1/4"	1/4" to 5/16"	3/8"
Diameter	10" to 20"	12" to 36"	12" to 48"
Face Width	20" to 63"	12" to 60"	24" to 78"

*Available in abrasion resistant steel



NO MORE BENT WINGS



NO MORE RIPPED EXPENSIVE BELTS


GRAIN ELEVATOR PULLEYS

PULLEYS

- Head pulleys
 - ↳ Steel
 - ↳ Vulcanized lagging
 - ↳ Static conductive / oil resistant / flame resistant slide lagging
- Available bolt on lagging
- Boot pulleys
- Chevron® Pulleys
 - ↳ Optional contact ring
 - ↳ Round bar or flat contact ring
 - ↳ Available with 1" or 1-1/2" round contact bars
- Enclosed belt Chevron Pulley
- Standard wing
- Spiral wrapped wing

WHY CHEVRON PULLEY?

- Original v-shaped wing design
- Quieter operation with wing design maintaining constant contact with the belt
- Less vibration extends bearing life and reduces dust
- Wing extensions direct grain back onto belt
- Easier on belting and splices
- Sheds material more freely

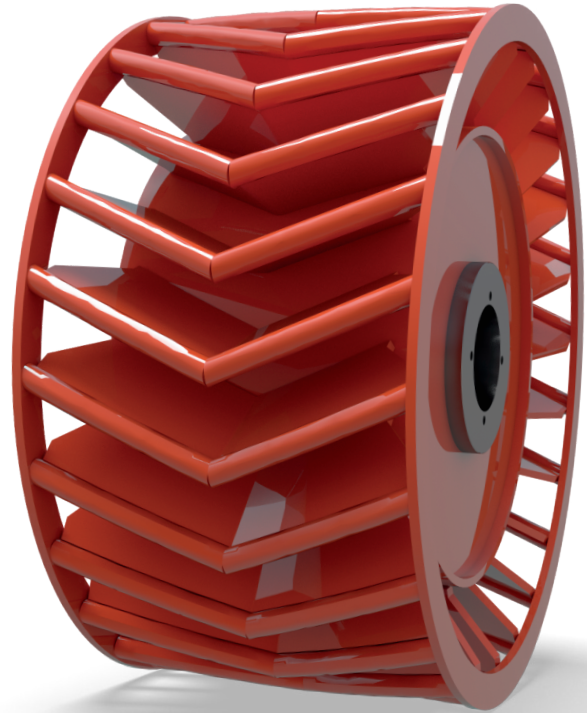


Chevron® Boot Pulley with Sensor Ring



HEAD PULLEY (SLIDE LAGGING)



BOLT ON SLIDE LAGGING

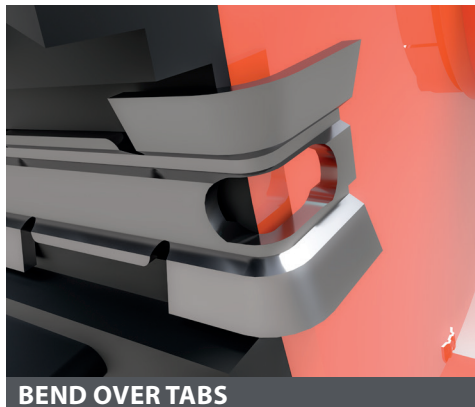

BEND OVER TABS



SINGLE DISC PULLEY



ENCLOSED BELT CHEVRON® PULLEY

CORE SYSTEMS® DESIGN

APPLICATION ENGINEERED

- Ensures power requirements are met
- Rust prevention treatment on shaft

MANUFACTURING CAPABILITIES

- Certified by American Welding Society (AWS D1.1)
- On-site weld inspection, nondestructive testing and x-rays
- Machined rims, lagging, balancing and thermal stress relief
- Keyless locking assemblies create tightest fit around shaft
- Reference page 14 for lagging capabilities

AVAILABLE ON REQUEST


- Assembly drawings
- Industry leading brands of power transmission components

PRE-ASSEMBLED PACKAGES

- Eliminates the headaches of on-site assembly
- Reduces installation time

FAST SERVICE AND SUPPORT


- Expedited services available
- 24/7 emergency support
- Nationwide distribution
- Two-year warranty

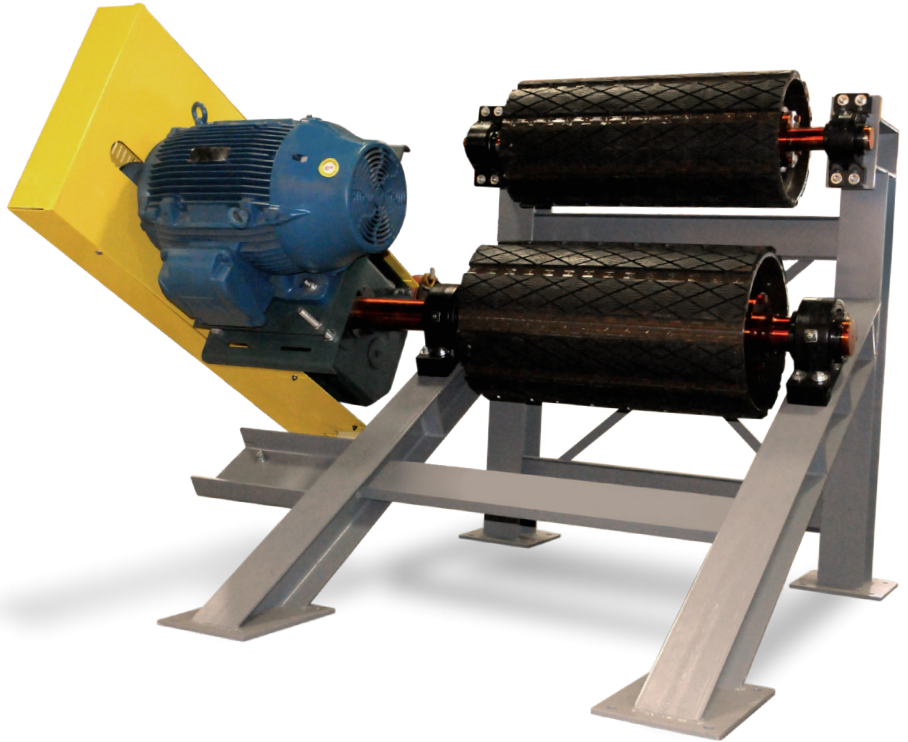


IN APPLICATION




DUAL DRIVE ASSEMBLY

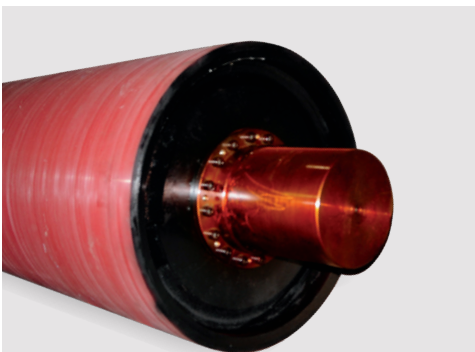

TURBINE END DISC / KEYLESS LOCKING DEVICE

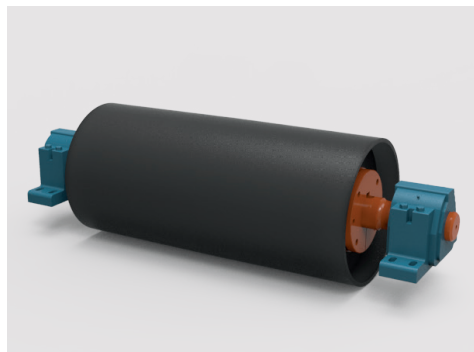


HEAD END DRIVE ASSEMBLY

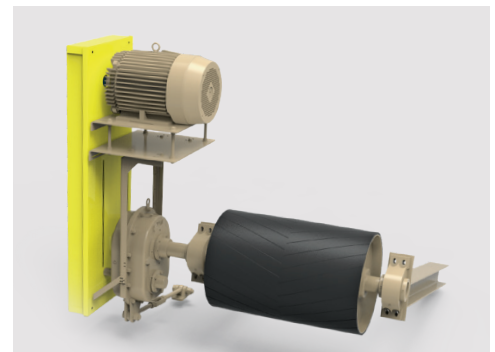


SHAFT MOUNT DRIVE ASSEMBLY

SPECIALIZED PULLEYS

SPIRAL DRUM PULLEY

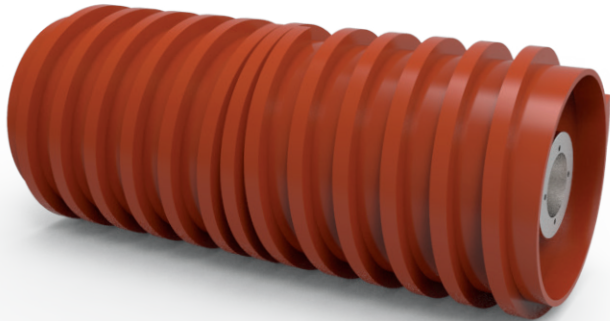


SPIRAL WING PULLEY

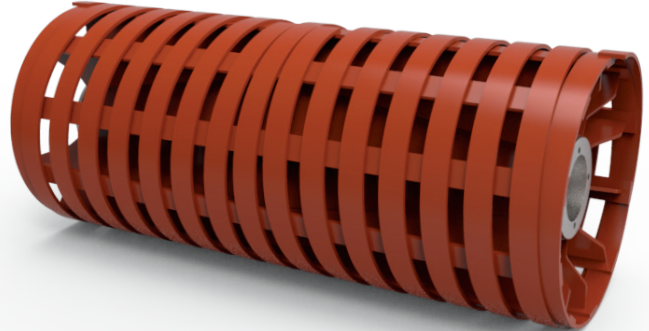


BEATER BAR




ROUND BAR SUPER WING PULLEY

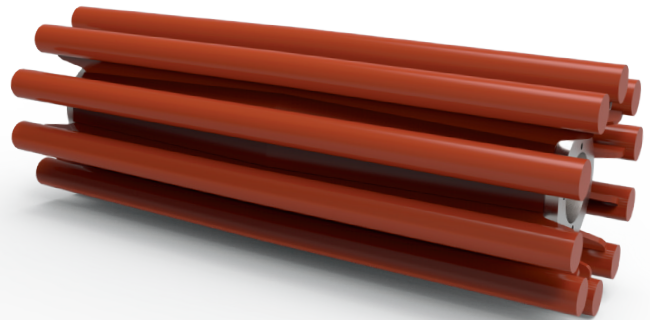

DEFLECTION WHEEL

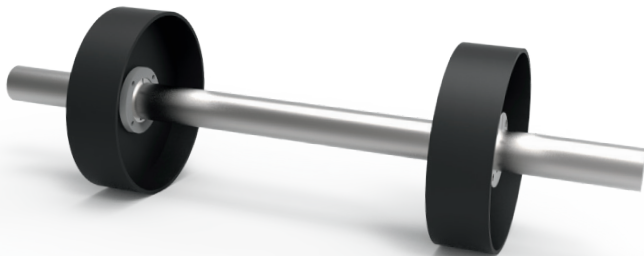

DEAD SHAFT PULLEYS

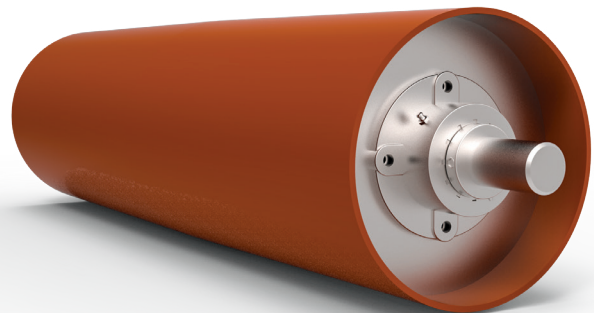

CONVEYOR TAKE-UP FRAMES

TELESCOPING TUBE TAKE-UP

Part Number Example:

TUTT-350-12

Take Up Style + **Size of Frame** + Travel Distance
(Telescoping Tube Take-Up Frame 300 Series with 12" of Travel)



WIDE SLOT TAKE-UP

Part Number Example:

TUWS-200-18

Take Up Style + **Size of Frame** + Travel Distance
(Wide Slot Take-Up Frame 200 Series with 18" of Travel)




TOP ANGLE TAKE-UP

Part Number Example:

TUTA-400-24

Take Up Style + **Size of Frame** + Travel Distance
(Top Angle Take-Up Frame 400 Series with 24" of Travel)

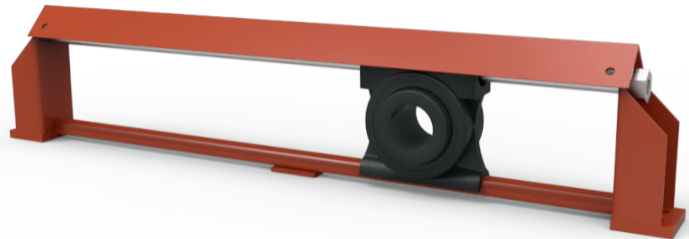

LIGHT DUTY TAKE-UP

Part Number Example:

TULD-500-24

Take Up Style + **Size of Frame** + Travel Distance
(Light Duty Take-Up Frame 250 Series with 30" of Travel)



HEAVY DUTY TAKE-UP

Part Number Example:

TUHD-350-60

Take Up Style + **Size of Frame** + Travel Distance
(Heavy Duty Take-Up Frame 350 Series with 36" of Travel)



CENTER PULL TAKE-UP

Part Number Example:

TUCP-515-36

Take Up Style + **Size of Frame** + Travel Distance
(Center Pull Take-Up Frame 515 Series with 36" of Travel)



TELESCOPING TUBE TAKE-UP (TUTT)

Figure 4.1 TUTT Drawings

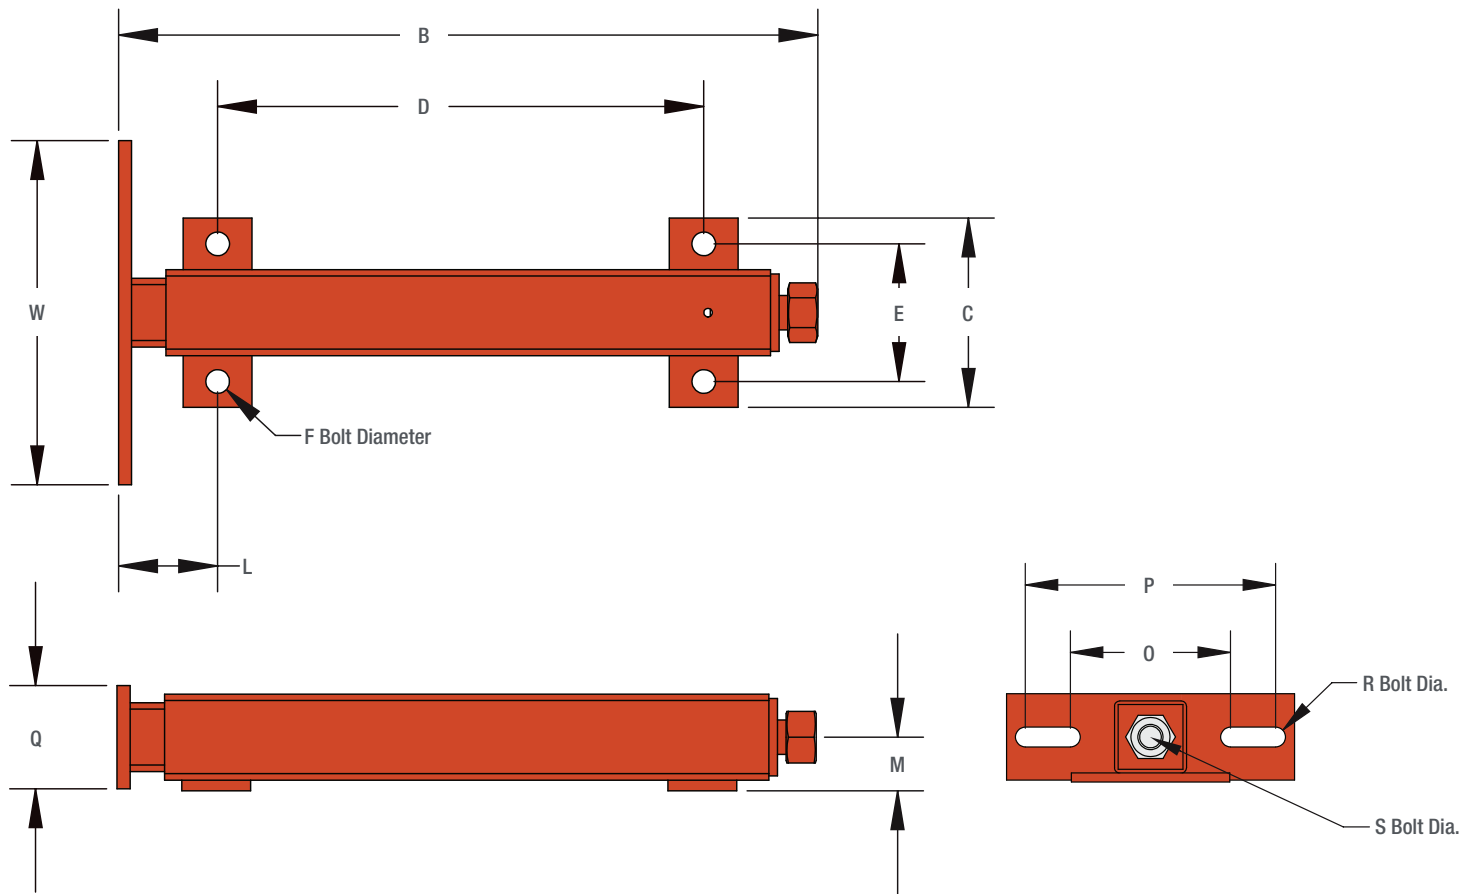


Table 7.1 TUTT Dimensions

PART NUMBER	TRAVEL	WT. (LBS)	B	C	D	E	F BOLT DIA.	L	M	O	P	Q	R BOLT DIA.	S ROD DIA.	W	BEARING RANGE
TUTT-100-3	3	3	7-1/8		3-9/16											
TUTT-100-6	6	4	10-5/8	3-11/16	7-1/16	2-5/8	1/2	1-3/4	1-3/16	3-7/16	6-1/16	1-1/2	3/8	5/8	5-1/4	1/2" TO 1"
TUTT-100-9	9	5	14-5/8		11-1/16											
TUTT-250-3	3	5	8-9/16		4-3/8											
TUTT-250-6	6	7	11-1/2	4	7-3/8	3	1/2	2	1-3/16	3-9/16	5-5/16	2	1/2	3/4	7	3/4" TO 1-3/4"
TUTT-250-9	9	8	14-1/2		10-3/8											
TUTT-250-12	12	9	17-1/2		13-3/8											
TUTT-300-6	6	16	11-7/16		6-1/8											
TUTT-300-9	9	18	15-1/8	5-1/4	10-1/8	4	5/8	2-3/8	1-1/2	5-9/16	8-11/16	2-3/4	5/8	1	10	1-3/4" TO 2-15/16"
TUTT-300-12	12	21	19-1/8		14-1/8											
TUTT-300-18	18	26	26-1/8		21-1/8											
TUTT-350-9	9	24	19		12-5/8 to 13											
TUTT-350-12	12	28	22	6	15-5/8 to 16	4-1/2	5/8	2-1/2	1-3/4	5-9/16	8-11/16	3	5/8	1	10	1-3/4" TO 2-15/16"
TUTT-350-18	18	35	28		21-5/8 to 22											
TUTT-350-24	24	43	34		27-5/8 to 28											
TUTT-400-12	12	52	27-3/4		20											
TUTT-400-18	18	62	33-3/4		26											
TUTT-400-24	24	72	39-3/4	7-1/2	32	5-1/2	3/4	3-1/2	2-1/8	8-1/2	11-3/4	3-1/2	3/4	1-1/2	14	2-7/16" TO 3-1/2"
TUTT-400-36	36	92	51-3/4		44											
TUTT-400-48	48	112	63-3/4		56											
TUTT-500-18	18	216	41-3/8		31											
TUTT-500-24	24	243	47-3/8		37											
TUTT-500-36	36	299	59-3/8	11-1/2	49	9	1	3-7/8	3-1/2	Made To Order	Made To Order	7	Made To Order	2	20	3-11/16" TO 6"
TUTT-500-48	48	355	71-3/8		61											
TUTT-500-60	60	410	83-3/8		73											

Add "D" to the end of part number for a direct weld. No bolt flange or foot plate is included.

WIDE SLOT TAKE-UP (TUWS)

Figure 4.2 TUWS Drawings

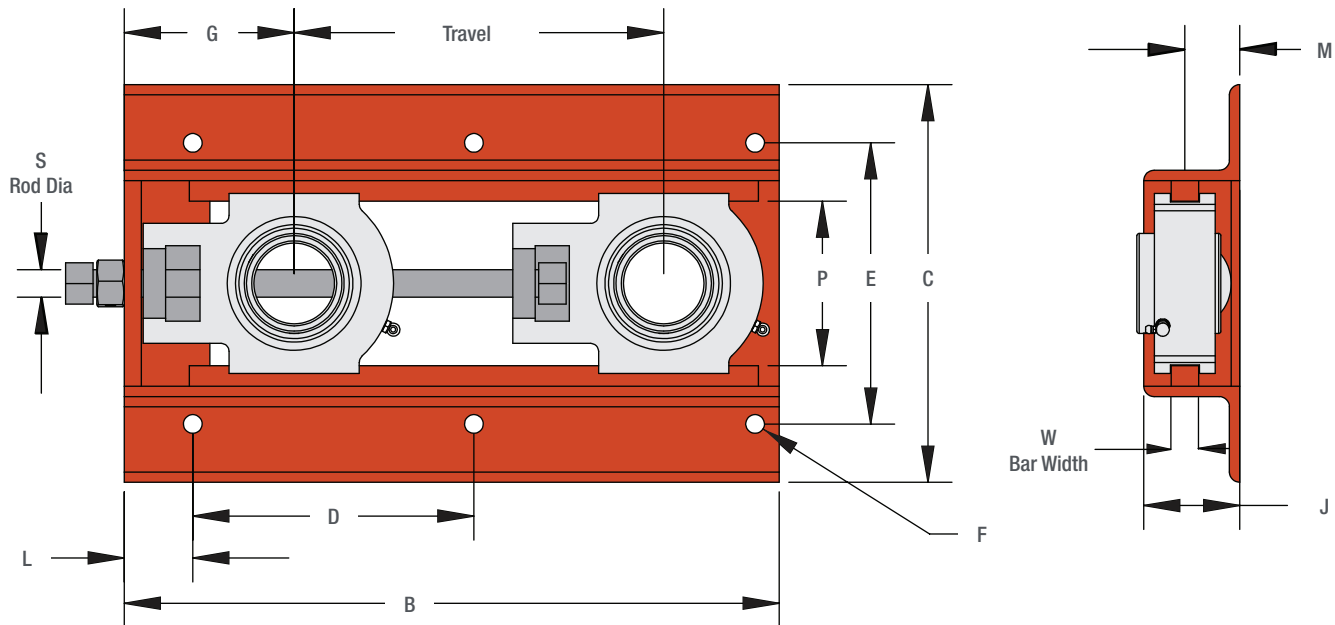


Table 7.2 TUWS Dimensions

PART NUMBER	TRAVEL DISTANCE	WT. (LBS)	B	C	D	E	F BOLT DIA.	# OF BOLTS	G	J	L	M	P	S ROD DIA.	W BAR WIDTH
TUWS-100-1.5	1-1/2	5	7-1/2		5-3/8			4							
TUWS-100-3	3	6	9	7-5/16	6-7/8	5-9/16	7/16	4	2-15/16	2	1	1-1/16	3-1/16	5/8	1/2
TUWS-100-6	6	7	12		4-15/16			6							
TUWS-100-9	9	8	15		6-7/16			6							
TUWS-100-12	12	10	18		7-15/16			6							
TUWS-150-3	3	6	9-1/8		6-7/16			4							
TUWS-150-6	6	8	12-1/8	7-13/16	9-7/16	6-1/16	7/16	4	3-11/16	2	1	1-1/4	3-9/16	3/4	1/2
TUWS-150-9	9	9	15-1/8		6-7/32			6							
TUWS-150-12	12	10	18-1/8		7-23/32			6							
TUWS-150-18	18	14	24-1/8		10-23/32			6							
TUWS-200-3	3	11	10-3/4		8-1/2			4							
TUWS-200-6	6	13	13-3/4	8-9/16	11-1/2	7-5/16	1/2	4	4-5/16	2-1/2	1-1/8	1-7/16	4-1/16	1	5/8
TUWS-200-9	9	16	16-3/4		7-1/4			6							
TUWS-200-12	12	18	19-3/4		8-3/4			6							
TUWS-200-18	18	25	25-3/4		11-3/4			6							
TUWS-200-24	24	29	31-3/4		14-3/4			6							
TUWS-250-3	3	17	11-3/4		9-1/2			4							
TUWS-250-6	6	20	14-3/4	10-11/16	12-1/2	8-5/8	9/16	4	5-11/16	3	1-1/8	1-1/2	5-3/16	1-1/4	1
TUWS-250-9	9	24	17-3/4		15-1/12			4							
TUWS-250-12	12	28	20-3/4		9-1/4			6							
TUWS-250-18	18	35	26-3/4		12-1/4			6							
TUWS-250-24	24	43	32-3/4		15-1/4			6							
TUWS-250-30	30	50	38-3/4		18-1/4			6							
TUWS-300-9	9	41	20-7/8		17-1/2			4							
TUWS-300-12	12	46	23-7/8	12	10-1/4	10-1/4	5/8	6	6-1/2	3-1/2	2-1/2	2	6	1-1/2	1
TUWS-300-18	18	57	29-7/8		13-1/4			6							
TUWS-300-24	24	67	35-7/8		16-1/4			6							
TUWS-300-30	30	78	41-7/8		19-1/4			6							
TUWS-350-9	9	42	20-7/8		17-1/2			4							
TUWS-350-12	12	47	23-7/8	12-9/16	10-1/4	10-13/16	5/8	6	6-1/2	3-1/2	2-1/2	2	6-9/16	1-1/2	1
TUWS-350-18	18	58	29-7/8		13-1/4			6							
TUWS-350-24	24	68	35-7/8		16-1/4			6							
TUWS-350-30	30	79	41-7/8		19-1/4			6							

To order a wideslot take-up cover add "C" at the end of the part #.
Example TUWS-350-18C, (This only orders a cover, not the take-up.)

LIGHT DUTY TAKE-UP (TULD)

Figure 4.3 TULD Drawings

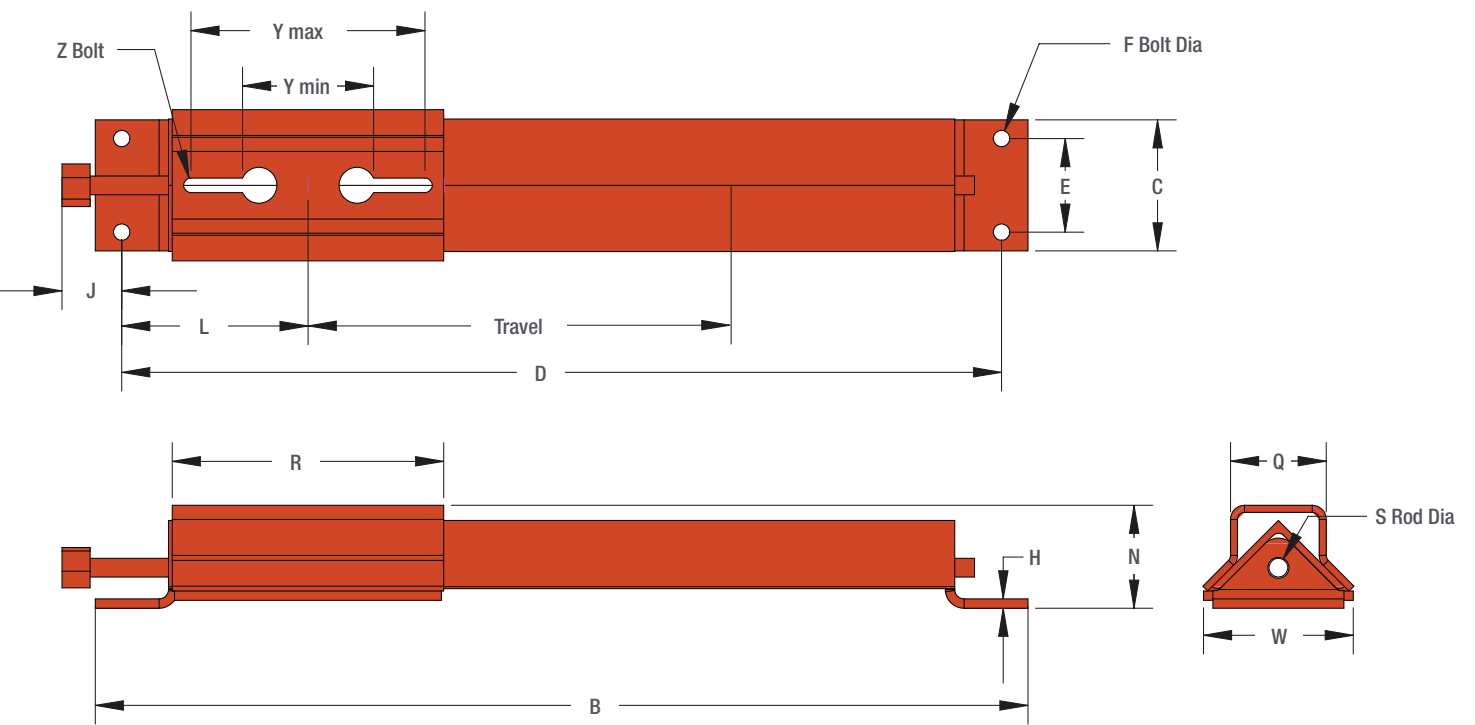


Table 7.3 TULD Dimensions

PART NUMBER	TRAVEL	WT (LBS)	B	C	D	E	F BOLT DIA	H	J	L	N	Q	R	S ROD DIA	W	Y (BOLT TO BOLT)		Z BOLT DIA X LENGTH
																MIN	MAX	
TULD-100-6	6	12	19-1/2	3 1/2	18	2-1/2	3/8	1/4	1- 3/4	4-1/4	2-3/4	1-1/2	5-3/8	3/4	3-3/4	2-7/8	4-3/4	3/8 x 1-1/2
TULD-100-9	9	12	22		20-1/2													
TULD-100-12	12	14	25		23-1/2													
TULD-100-18	18	17	33-1/2		32													
TULD-200-6	6	13	19-1/2	3 1/2	18	2-1/2	3/8	1/4	1-3/4	5-1/4	2-3/4	2	7-1/4	3/4	3-3/4	4-7/16	6-1/4	1/2 x 2-1/2
TULD-200-9	9	14	22		20-1/2													
TULD-200-12	12	15	25		23-1/2													
TULD-200-18	18	18	33-1/2		32													
TULD-200-24	24	20	39-1/2		38													
TULD-300-6	6	14	22-1/4	3 1/2	20-3/4	2-1/2	1/2	1/4	1-3/4	5-5/8	2-3/4	2-1/2	8-3/8	3/4	3-3/4	5-3/4	7-3/8	5/8 x 3
TULD-300-12	12	17	28-1/4		26-3/4													
TULD-300-18	18	19	34-1/4		32-3/4													
TULD-300-24	24	21	40-1/4		38-3/4													
TULD-300-30	30	23	46-1/4		44-3/4													
TULD-400-6	6	17	22-1/4	4 3/4	20-1/2	3	5/8	5/16	1-7/8	6-5/8	3-3/16	2-1/2	8-7/8	3/4	4-3/8	6-3/8	7-7/8	5/8 x 3
TULD-400-12	12	20	28-1/4		26-1/2													
TULD-400-18	18	23	34-1/4		32-1/2													
TULD-400-24	24	25	40-1/4		38-1/2													
TULD-400-30	30	27	46-1/4		44-1/2													
TULD-400-36	36	30	52-1/4		50-1/2													
TULD-450-12	12	37	33-1/4	5	31-1/2	3	3/4	5/16	2-3/16	8-1/2	4-1/8	3-3/4	12-1/2	1	6	7-1/4	11-1/2	3/4 x 3 1/2
TULD-450-18	18	40	39-1/4		37-1/2													
TULD-450-24	24	44	45-1/4		43-1/2													
TULD-450-30	30	48	51-1/4		49-1/2													
TULD-450-36	36	51	57-1/4		55-1/2													
TULD-450-42	42	56	63-1/4		61-1/2													
TULD-450-48	48	59	69-1/4		67-1/2													
TULD-500-12	12	37	33-1/4	5	31-1/2	3	3/4	5/16	2-3/16	8-1/2	4-1/8	3-3/4	12-5/8	1	6	7-1/2	11-5/8	7/8 x 4
TULD-500-18	18	40	39-1/4		37-1/2													
TULD-500-24	24	44	45-1/4		43-1/2													
TULD-500-30	30	48	51-1/4		49-1/2													
TULD-500-36	36	52	57-1/4		55-1/2													
TULD-500-42	42	56	63-1/4		61-1/2													
TULD-500-48	48	60	69-1/4		67-1/2													

HEAVY DUTY TAKE-UP (TUHD)

Figure 4.4 TUHD Drawings

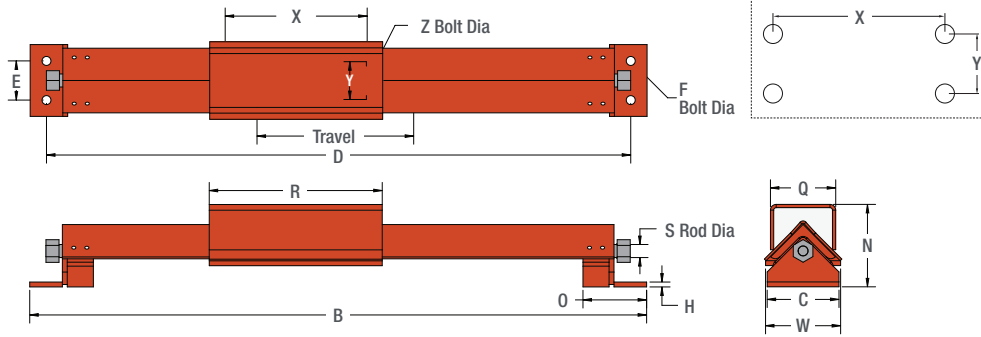


Figure 4.4-A TUHD
Bearing bolt pattern EX.

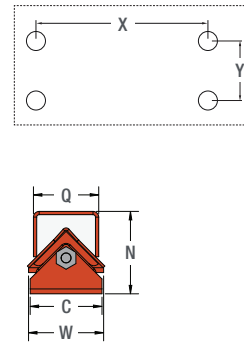


Table 7.4-a TUHD BOLT Dimensions

SPECS	BEARING BRAND	
	REXNORD	REXNORD
Part Number	Rex ZEP-5215	ZAF-6307F
Bearing Size	2-5/16"	3-7/16"
Hole Pattern (2 or 4 Hole)	2 Bolt	4 Bolt
Dimension X	9-3/4"	13-1/8"
Dimension Y	-	2-3/8"
Z Bolt Diameter	3/4"	3/4"

Table 7.4 TUHD Dimensions

PART NUMBER	TRAVEL	WT (LBS)	B	C	D	E	F BOLT DIA	H	N	O	Q	R	S ROD DIA	W	X	Y	Z BOLT DIA
TUHD-200-12	12	49	31		29												
TUHD-200-18	18	55	37		35												
TUHD-200-24	24	61	43		41												
TUHD-200-30	30	67	49		47												
TUHD-200-36	36	73	55	5	53	2-1/2	5/8	1/4	5-1/4	4-1/4	4-5/8	11	1	6-1/16	*	*	*
TUHD-200-42	42	79	61		59												
TUHD-200-48	48	85	67		65												
TUHD-200-60	60	97	79		77												
TUHD-250-12	12	66	35-1/4		32-3/4												
TUHD-250-18	18	73	41-1/4		38-3/4												
TUHD-250-24	24	80	47-1/4		44-3/4												
TUHD-250-30	30	87	53-1/4	5-1/2	50-3/4	3	5/8	3/8	6-1/4	4-7/8	5	13-1/4	1	6-1/16	*	*	*
TUHD-250-36	36	94	59-1/4		56-3/4												
TUHD-250-42	42	101	65-1/4		62-3/4												
TUHD-250-48	48	108	71-1/4		68-3/4												
TUHD-250-60	60	122	83-1/4		80-3/4												
TUHD-300-12	12	85	38-1/4		35-1/2												
TUHD-300-18	18	92	44-1/4		41-1/2												
TUHD-300-24	24	99	50-1/4		47-1/2												
TUHD-300-30	30	106	56-1/4	6-1/2	53-1/2	3	3/4	1/2	7	6	6	14-1/4	1-1/4	6-7/8	*	*	*
TUHD-300-36	36	113	62-1/4		59-1/2												
TUHD-300-42	42	120	68-1/4		65-1/2												
TUHD-300-48	48	127	74-1/4		71-1/2												
TUHD-300-60	60	141	86-1/4		83-1/2												
TUHD-350-12	12	94	40		37-1/4												
TUHD-350-18	18	101	46		43-1/4												
TUHD-350-24	24	108	52		49-1/4												
TUHD-350-30	30	115	58	6-1/2	55-1/4	3	3/4	1/2	7	6	6	16	1-1/4	7-7/16	*	*	*
TUHD-350-36	36	122	64		61-1/4												
TUHD-350-42	42	129	70		67-1/4												
TUHD-350-48	48	136	76		73-1/4												
TUHD-350-60	60	150	88		85-1/4												
TUHD-400-12	12	117	44		41-1/4												
TUHD-400-18	18	126	50		47-1/4												
TUHD-400-24	24	135	56		53-1/4												
TUHD-400-30	30	144	62	6-1/2	59-1/4	3	3/4	1/2	7	6	7	20	1-1/4	7-1/4	*	*	*
TUHD-400-36	36	153	68		65-1/4												
TUHD-400-42	42	162	74		71-1/4												
TUHD-400-48	48	171	80		77-1/4												
TUHD-400-60	60	189	92		89-1/4												
TUHD-500-12	12	168	49-1/2		47												
TUHD-500-18	18	178	55-1/2		53												
TUHD-500-24	24	188	61-1/2		59												
TUHD-500-30	30	198	67-1/2	7	65	4	7/8	1/2	7-3/4	6	8-1/2	23-1/2	1-1/2	8	*	*	*
TUHD-500-36	36	208	73-1/2		71												
TUHD-500-42	42	218	79-1/2		77												
TUHD-500-48	48	228	85-1/2		83												
TUHD-500-60	60	248	97-1/2		95												
TUHD-600-12	12	269	57-3/4		54-1/4												
TUHD-600-18	18	282	63-3/4		60-1/4												
TUHD-600-24	24	295	69-3/4		66-1/4												
TUHD-600-30	30	308	75-3/4	10	72-1/4	6	1	1/2	10-1/4	10	10	25-3/4	2	10	*	*	*
TUHD-600-36	36	321	81-3/4		78-1/4												
TUHD-600-42	42	334	87-3/4		84-1/4												
TUHD-600-48	48	347	93-3/4		90-1/4												
TUHD-600-60	60	373	105-3/4		102-1/4												
TUHD-800-12	12	506	70-7/8		60-7/8												
TUHD-800-18	18	528	76-7/8		66-7/8												
TUHD-800-24	24	550	82-7/8		72-7/8												
TUHD-800-30	30	572	88-7/8	12	78-7/8	6	1-1/4	3/4	12-5/8	10-7/16	12	36	2-1/2	12-1/2	*	*	*
TUHD-800-36	36	594	94-7/8		84-7/8												
TUHD-800-42	42	616	100-7/8		90-7/8												
TUHD-800-48	48	638	106-7/8		96-7/8												
TUHD-800-60	60	682	118-7/8		108-7/8												

*Consult Superior with bearing specifications, bearing holes can be drilled to order.

TOP ANGLE TAKE-UP (TUTA)

Figure 4.5 TUTA Drawings

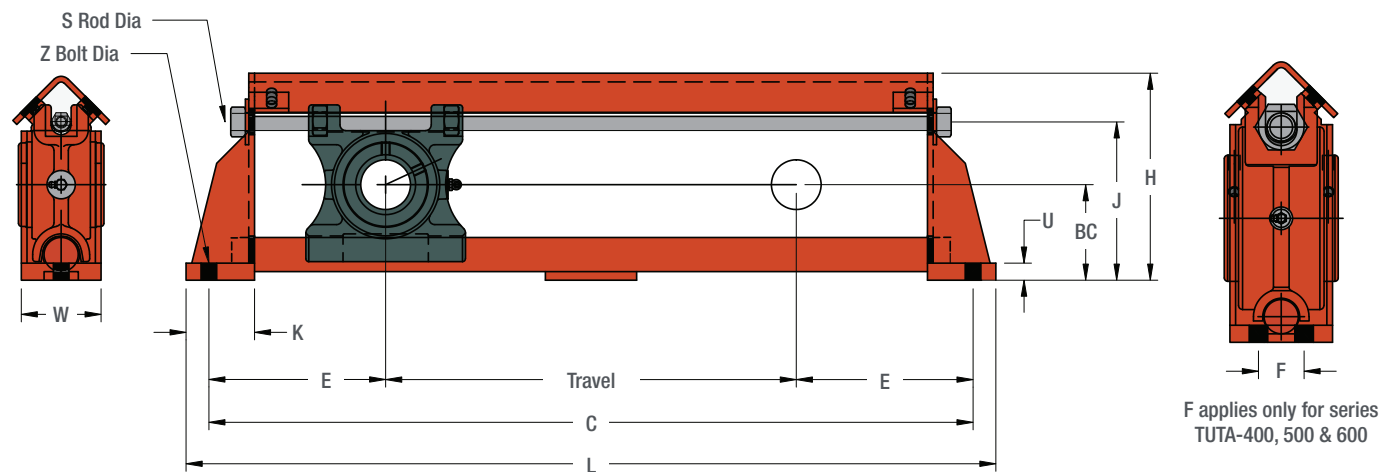


Table 7.5 TUTA Dimensions

PART NUMBER	TRAVEL	WT (LBS)	BC	C	E	F	H	J	K	L	S ROD DIA	U	W	Z BOLT DIA
TUTA-100-12	12	35	3-15/16	26-1/2	7-1/4	N/A	8-3/8	6-5/16	3	28-1/2	3/4	3/4	3-1/2	5/8
TUTA-100-18	18	47		32-1/2						34-1/2				
TUTA-100-24	24	52		38-1/2						40-1/2				
TUTA-200-12	12	38	4-3/16	27-1/2	7-3/4	N/A	8-15/16	6-15/16	3	29-1/2	3/4	3/4	3-1/2	5/8
TUTA-200-18	18	49		33-1/2						35-1/2				
TUTA-200-24	24	56		39-1/2						41-1/2				
TUTA-300-12	12	45	4-3/8	28-1/2	8-1/4	N/A	9-15/16	7-3/8	3-1/2	30-1/2	1	3/4	4	3/4
TUTA-300-18	18	58		34-1/2						36-1/2				
TUTA-300-24	24	65		40-1/2						42-1/2				
TUTA-300-30	30	80		46-1/2						48-1/2				
TUTA-300-36	36	88		52-1/2						54-1/2				
TUTA-300-42	42	97		58-1/2						60-1/2				
TUTA-300-48	48	106		64-1/2						66-1/2				
TUTA-400-12	12	59	4-15/16	30-1/2	9-1/4	2	10-7/8	8-5/16	3-1/2	32-1/2	1	3/4	4-1/2	5/8
TUTA-400-18	18	71		36-1/2						38-1/2				
TUTA-400-24	24	80		42-1/2						44-1/2				
TUTA-400-30	30	90		48-1/2						50-1/2				
TUTA-400-36	36	99		54-1/2						56-1/2				
TUTA-400-42	42	108		60-1/2						62-1/2				
TUTA-400-48	48	117		66-1/2						68-1/2				
TUTA-500-12	12	70	5-7/16	32	10	2	12-5/16	9-7/16	4	34-1/2	1-1/4	3/4	4-1/2	3/4
TUTA-500-18	18	78		38						40-1/2				
TUTA-500-24	24	89		44						46-1/2				
TUTA-500-30	30	102		50						52-1/2				
TUTA-500-36	36	112		56						58-1/2				
TUTA-500-42	42	122		62						64-1/2				
TUTA-500-48	48	131		68						70-1/2				
TUTA-600-12	12	87	7	36	12	2-1/2	14-1/16	11-3/8	4-1/2	38-1/2	1-1/4	3/4	5-1/2	3/4
TUTA-600-18	18	97		42						44-1/2				
TUTA-600-24	24	106		48						50-1/2				
TUTA-600-30	30	116		54						56-1/2				
TUTA-600-36	36	125		60						62-1/2				
TUTA-600-42	42	135		66						68-1/2				
TUTA-600-48	48	145		72						74-1/2				

CENTER PULL TAKE-UP (TUCP)

Figure 4.6 TUCP Drawings

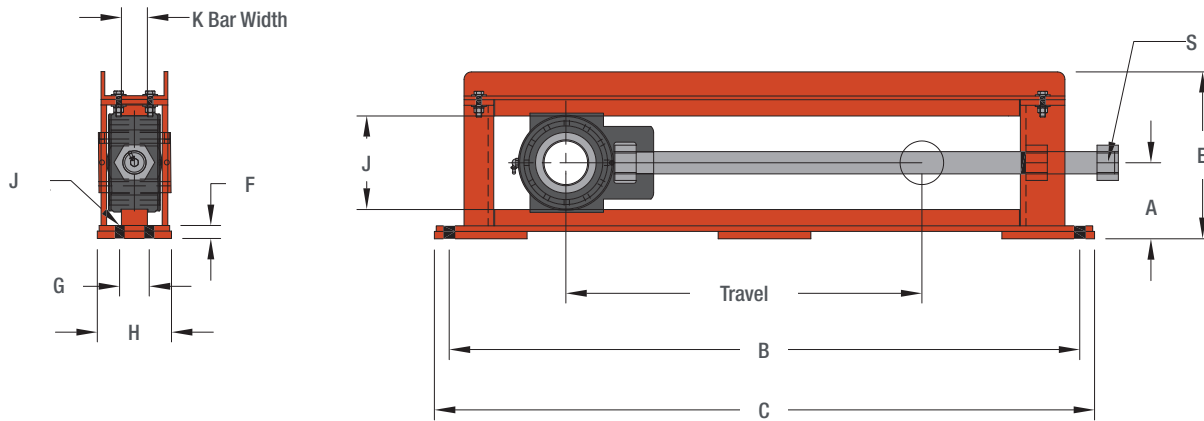


Table 7.6 TUCP Dimensions

PART NUMBER	TRAVEL	WT (LBS)	A	B	C	E	F	H	G	J	K	S ROD DIA	Z BOLT DIA
TUCP-308-12	12	32		26	28								
TUCP-308-18	18	37		32	34								
TUCP-308-24	24	41	3-7/16	38	40	7	11/16	3	N/A	3-5/8	1/2	3/4	1/2
TUCP-308-30	30	47		44	46								
TUCP-308-36	36	52		50	52								
TUCP-400-12	12	52		27-1/2	29-1/2								
TUCP-400-18	18	60		33-1/2	35-1/2								
TUCP-400-24	24	68	3-15/16	39-1/2	41-1/2	8-5/8	13/16	4	N/A	4-1/8	5/8	1	5/8
TUCP-400-30	30	76		45-1/2	47-1/2								
TUCP-400-36	36	84		51-1/2	53-1/2								
TUCP-408-12	12	54		27-1/2	29-1/2								
TUCP-408-18	18	62		33-1/2	35-1/2								
TUCP-408-24	24	70	4-7/16	39-1/2	41-1/2	9-1/4	11/16	4	N/A	4-5/8	3/4	1-1/8	5/8
TUCP-408-30	30	78		45-1/2	47-1/2								
TUCP-408-36	36	86		51-1/2	53-1/2								
TUCP-502-12	12	62		28-1/2	30-1/2								
TUCP-502-18	18	72		34-1/2	36-1/2								
TUCP-502-24	24	82	4-3/8	40-1/2	42-1/2	9-1/2	13/16	4	N/A	5-1/4	1	1-1/4	3/4
TUCP-502-30	30	92		46-1/2	48-1/2								
TUCP-502-36	36	102		52-1/2	54-1/2								
TUCP-515-12	12	99		30-1/2	32-1/2								
TUCP-515-18	18	115		36-1/2	38-1/2								
TUCP-515-24	24	131	5-1/8	42-1/2	44-1/2	11-5/32	7/8	5	2	6	1-3/4	1-1/2	5/8
TUCP-515-30	30	148		48-1/2	50-1/2								
TUCP-515-36	36	164		54-1/2	56-1/2								
TUCP-613-12	12	125		32	34-1/4								
TUCP-613-18	18	148		38	40-1/4								
TUCP-613-24	24	171	5-5/8	44	46-1/4	12-1/16	15/16	5	2	6-7/8	1-3/4	1-3/4	3/4
TUCP-613-30	30	194		50	52-1/4								
TUCP-613-36	36	217		56	58-1/4								
TUCP-810-12	12	176		36	38-1/2								
TUCP-810-18	18	200		42	44-1/2								
TUCP-810-24	24	224	7	48	50-1/2	14-3/4	1-3/16	6	2-1/2	8-3/4	2	2	3/4
TUCP-810-30	30	248		54	56-1/2								
TUCP-810-36	36	272		60	62-1/2								
TUCP-908-12	12	285		40-3/4	45-3/4								
TUCP-908-18	18	317		46-3/4	51-3/4								
TUCP-908-24	24	349	7-1/2	52-3/4	57-3/4	16-1/16	1-1/4	9	5	9-5/8	2	2	1-1/8
TUCP-908-30	30	381		58-3/4	63-3/4								
TUCP-908-36	36	413		64-3/4	69-3/4								
TUCP-908-42	42	445		70-3/4	75-3/4								
TUCP-1004-12	12	391		44-1/2	49-1/2								
TUCP-1004-18	18	430		50-1/2	55-1/2								
TUCP-1004-24	24	469	8-1/8	56-1/2	61-1/2	17-5/16	1-1/2	10	5-1/2	10-3/8	2	2-1/4	1-1/8
TUCP-1004-30	30	508		62-1/2	67-1/2								
TUCP-1004-36	36	547		68-1/2	73-1/2								
TUCP-1004-42	42	586		74-1/2	79-1/2								

TAKE-UP INTERCHANGE & BEARING SIZES

Table 7.7 TUTA INTERCHANGE AND BEARING SIZES

TOP ANGLE TAKE-UP FRAME SIZES				BEARING SIZES (BY BEARING TYPE)			
SUPERIOR	DODGE	PPI	CCI	DODGE TYPE E TPE, LINK BELT ETPB22400	DODGE S-2000	NORMAL DUTY DODGE TYPE G* (SC)	MEDIUM DUTY DODGE TYPE GM** (SCM)
TUTA-100	TP-10	PTA200	CTA10	1-3/4" to 2"	1-15/16" to 2"	1-15/16" to 2"	1-11/16" to 1-3/4"
TUTA-200	TP-20	PTA203	CTA20	2-3/16"	-	2-3/16" to 2-1/4"	1-15/16" to 2"
TUTA-300	TP-30	PTA208	CTA30	2-1/4" to 2-1/2"	2-3/16"	2-7/16"	2-3/16" to 2-1/4"
TUTA-400	TP-40	PTA300	CTA40	2-11/16" to 3"	2-7/16" to 3"	2-15/16"	2-7/16" to 2-11/16"
TUTA-500	TP-50	PTA308	CTA50	3-3/16" to 3-1/2"	3-7/16"	-	2-15/16" to 3"
TUTA-600	TP-60	PTA400	CTA60	3-15/16" to 4"	3-15/16"	-	3-7/16" to 3-1/2"

Table 7.8 TUHD INTERCHANGE AND BEARING SIZES

HEAVY DUTY TAKE-UP FRAME SIZES						BEARING SIZES (BY BEARING TYPE)			
SUPERIOR	DODGE	PPI	CCI	LINK BELT	BROWNING	DODGE TYPE E, REX ZEP, LINK BELT EPB22400, SKF SYE	DODGE S-2000, REX ZA, LINK BELT PB22400, SKF SYR	DODGE TAF, REX ZAF, SEALMASTER USRB	DODGE USAF/SAF-XT/ SAFS/ISAF, SKF SAF22500, LINK BELT PLB6800
TUHD-200	HD-200	PHD200	CHD200	LHD20	T2000A/B/C	1-7/16" to 2-1/2"	1-7/16" to 2-1/2"	1-7/16" to 2-1/2"	1-7/16" to 2-3/16"
TUHD-250	HD-250	PHD208	CHD250	LHD25	T2000D/E	2-11/16" to 3"	2-11/16" to 3"	2-11/16" to 3"	2-7/16" to 3"
TUHD-300	HD-300	PHD300	CHD300	LHD30	T2000F/G	-	3-3/16" to 3-1/2"	-	3-3/16"
TUHD-350	HD-350	PHD308	CHD350	LHD35	T2000H/J	3-3/16" to 3-1/2"	3-15/16" to 4-1/2"	3-3/16" to 4"	3-7/16" to 3-1/2"
TUHD-400	HD-400	PHD400	CHD400	LHD40	T2000K	3-15/16" to 5"	4-15/16" to 5"	4-7/16" to 5"	3-15/16" to 4-1/2"
TUHD-500	HD-500	PHD500	CHD500	LHD50	T2000M/N	5-7/16" to 6"	-	5-7/16"	4-15/16" to 5-1/2"
TUHD-600	-	PHD600	-	-	-	6-7/16" to 7"	-	5-15/16" to 6"	5-15/16" to 6"
TUHD-800	-	PHD800	-	-	-	-	-	6-7/16" to 7"	6-7/16" to 9"

Table 7.9 TULD INTERCHANGE AND BEARING SIZES

LIGHT DUTY TAKE-UP FRAME SIZES			BEARING SIZES (BY BEARING TYPE)		
SUPERIOR	DODGE	PPI*	NORMAL DUTY - DODGE SC/SXR/DL/GT, SEALMASTER NP, BROWNING VPS-200	MEDIUM DUTY - DODGE SCM/DLM/GTM, SEALMASTER MP, BROWNING VPS-300	DODGE S-2000, REX ZA, LINK BELT PB22400, SKF SYR
TULD-100	LD-10	PLD/PMD100	1/2" to 1"	-	-
TULD-200	LD-20	PLD/PMD108	1-1/16" to 1-3/4"	1/2" to 1-1/2"	1-3/8" to 1-3/4"
TULD-300	LD-30	PLD/PMD200	1-15/16" to 2"	1-11/16" to 1-3/4"	1-15/16" to 2"
TULD-400	LD-40	PLD/PMD208	2-3/16" to 2-7/16"	1-15/16" to 2-1/4"	2-3/16" to 2-7/16"
TULD-450	LD-45	PLD/PMD300	2-1/2" to 2-11/16"	2-7/16" to 2-1/2"	2-11/16" to 3"
TULD-500	LD-50	PLD/PMD308	2-15/16"	2-11/16" to 3-1/2"	3-7/16"

* PLD = 2 Saddles & PMD = 1 saddle (Review height dimensions of manufacturer for exact dimensions)

Table 7.10 TUCP INTERCHANGE AND BEARING SIZES

CENTER PULL TAKE-UP FRAME SIZES						BEARING SIZES (BY BEARING TYPE)			
SUPERIOR	DODGE	PPI	CCI	REXNORD	BROWNING	DODGE TYPE E (WSTU-E), BROWNING TUE920	DODGE TYPE S-2000 (WSTU-S2), BROWNING ST1000	REX ZT2000	REX ZT5000
TUCP-308	CP308	PCP108	CCP308	ZHT-5	-	1-3/8" to 1-7/16"	1-3/8" to 1-1/2"	1-1/2"	-
TUCP-400	CP400	PCP200	CCP400	ZHT-6	T1000D	1-1/2" to 2"	1-11/16" to 2"	1-11/16" to 2"	1-1/2" to 1-15/16"
TUCP-408	CP408	PCP203	CCP408	ZHT-7	T1000EH	2-3/16"	2-3/16"	2-3/16" to 2-1/4"	2" to 2-3/16"
TUCP-502	CP502	PCP208	CCP502	ZHT-8	T1000F	2-1/4" to 2-1/2"	2-7/16"	2-3/8" to 2-1/2"	2-7/16"
TUCP-515	CP515	PCP300	CCP515	ZHT-9	T1000GH	2-11/16" to 3"	2-11/16" to 3"	2-11/16" to 3"	2-1/2" to 2-15/16"
TUCP-613	CP613	PCP308	CCP613	ZHT-10	T1000JH	3-7/16" (TUE920 only)	3-7/16"	3-3/16" to 3-1/2"	3-3/16" to 3-7/16"
TUCP-810	CP810	PCP400	CCP810	ZHT-11	T1000K	3-15/16" to 4-1/2" (TUE920)	3-15/16"	3-11/16" to 4"	3-11/16" to 4"
TUCP-908	CP908	PCP408	CCP908	ZHT-12	-	-	4-7/16"	-	4-3/16" to 4-1/2"
TUCP-1004	CP1004	PCP500	-	ZHT-13	-	-	4-15/16"	-	4-15/16" to 5"

Table 7.11 TUWS INTERCHANGE AND BEARING SIZES

WIDESLOT TAKE-UP FRAME SIZES			BEARING SIZES (BY BEARING TYPE)	
SUPERIOR	DODGE	PPI	NORMAL DUTY - DODGE SC/SXR/DL/GT, SEALMASTER ST, BROWNING VTWS-200	MEDIUM DUTY - DODGE SCM/DLM/GTM, SEALMASTER MST, BROWNING VTWS-300
TUWS-100	WS-300	PWS100	1/2" to 1"	-
TUWS-150	WS-308	PWS108	1-1/16" to 1-7/16"	1" to 1-1/4"
TUWS-200	WS-400	PWS200	1-1/2" to 2"	1-7/16" to 1-3/4"
TUWS-250	WS-502	PWS208	2" to 2-7/16"	1-15/16" to 2-1/4"
TUWS-300	WS-515	PWS300	2-1/2" to 2-15/16"	2-7/16" to 2-11/16"
TUWS-350	WS-608	PWS308	-	2-15/16" to 3"

XT BUSHING INSTALLATION

XT BUSHING INSTALLATION INSTRUCTIONS

Follow all instructions carefully to ensure satisfactory performance of both pulley and bushings. For factory installed shaft units, retighten the capscrews with a torque wrench set at the proper value shown on Table 8.1.

Prior to installation, polish the following components:

- Surface of shaft
- Bore of the bushing
- Tapered inside diameter of the XT hub
- Tapered outside diameter of the XT bushing

Remove all burrs and foreign material. Particles left on the mating surfaces may cause improper installation.

Note: DO NOT LUBRICATE MATING SURFACE

1. If pulley is to be keyed to shaft, be certain both shaft and bushing keyways are clean, smooth, and free of burrs. Check key size with both shaft and bushing keyways. Place keys into shaft keyways. Pulley bushing keyways require alignment of both shaft keyways for proper bushing to hub installation.
2. Place shaft into pulley, being certain not to damage the bore of the hubs.
3. Carefully insert a wedge in the bushing split and tap lightly to expand the bushing. USE CAUTION; EXCESSIVE EXPANSION WILL CAUSE THE BUSHING TO SPLIT. Slide bushings onto shaft and into hubs keeping the drilled holes of the bushings lined up with the threaded holes of the hub. Place the capscrews into the drilled holes of each bushing and hand-tighten cap screws into the threaded holes of the hubs. Remove the wedge.
4. Find the desired shaft position and tighten the capscrews in each bushing slightly so that the bushings are snug in the hubs.
5. Using a torque wrench and recommended torque (see Table 8.1) tighten capscrews alternately and evenly in one bushing only. Use the numbered sequence on the bush flange capscREW heads in Figure 4, starting with 1 first, 2 second, and so on, with all capscrews being tightened until the specified torque no longer turns the capscrews. DO NOT TIGHTEN BEYOND RECOMMENDED VALUES. Check to be certain the surfaces on both sides of the split are even.

WARNING: DO NOT EXCEED RECOMMENDED TORQUE IN ATTEMPT TO PULL BUSHING FLANGE FLUSH WITH HUB FACE - THERE SHOULD BE CLEARANCE WHEN TIGHTENED. If the bushing flange is pulled flush with hub face while tightening capscrews to recommended torque, check for undersized shaft.

6. Tighten the second bushing following step #5.

Figure 5.1 Numbered Capscrew Sequence

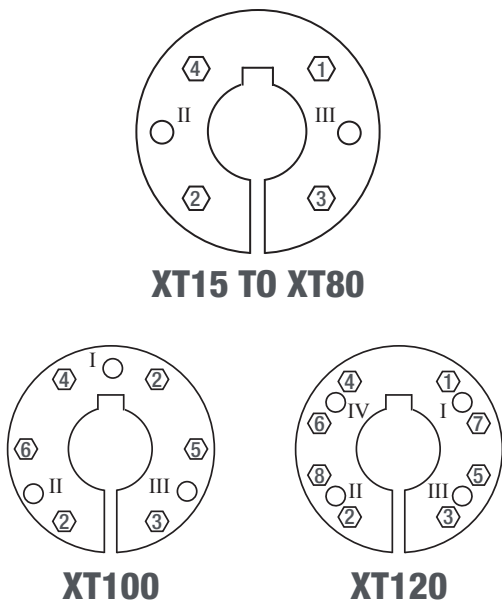


Table 8.1 Recommended XT Capscrew Torque

XT SIZE	NUMBER AND SIZE OF CAPSCREWS	SCREW TORQUE (IN.-LBS.)
XT15	(QTY 4) 1/4 – 20 NC X 1	96
XT20	(QTY 4) 5/16 – 18 NC X 1-1/4	204
XT25	(QTY 4) 3/8 – 16 NC X 1-3/4	360
XT30	(QTY 4) 7/16 – 14 NC X 1-1/2	540
XT35	(QTY 4) 1/2 – 13 NC X 1-3/4	840
XT40	(QTY 4) 9/16 – 12 NC X 2	1200
XT45	(QTY 4) 5/8 – 11 NC X 2-1/4	1680
XT50	(QTY 4) 3/4 – 10 NC X 2-1/2	3000
XT60	(QTY 4) 7/8 – 9 NC X 2-1/2	4800
XT70	(QTY 4) 1-8 NC X 3	7200
XT80	(QTY 4) 1-1/8 – 7 NC X 3-1/2	9000
XT100	(QTY 6) 1-1/8 – 7 NC X 3-1/2	9000
XT120	(QTY 8) 1-1/8 – 7 NC X 3-1/2	9000

QD BUSHING INSTALLATION

QD BUSHING INSTALLATION INSTRUCTIONS

Follow all instructions carefully to ensure satisfactory performance of both pulley and bushings. For factory installed shaft units, retighten the capscrews with a torque wrench set at the proper value shown in Table 8.2.

Prior to installation, polish the following components:

- Surface of shaft
- Bore of the bushing
- Tapered inside diameter of the QD® hub
- Tapered outside diameter of the QD® bushing

Remove all burrs and foreign material. Particles left on the mating surfaces may cause improper installation.

Note: DO NOT LUBRICATE MATING SURFACES

1. If pulley is to be keyed to shaft, be certain both the bushing keyway and the shaft keyseats are clean, smooth, and free of burrs. Check key size in both bushings and shaft keyways. Place keys into shaft keyseats. Pulley bushings require alignment of both shaft keyseats for proper bushing to hub installation.
2. Place shaft into pulley, being certain not to damage the bore of the hubs or the surface of the shaft, and locate the desired position.
3. Carefully insert a wedge in the bushing split and tap lightly to expand the bushing. USE CAUTION: EXCESSIVE EXPANSION WILL CAUSE THE BUSHING TO SPLIT. Slide bushings onto shaft and into hubs keeping the unthreaded holes of the bushings lined up with the threaded holes of the hub.
4. Place capscrews with locking washers into the unthreaded holes of each bushing and hand –tighten capscrews into the threaded holes of the hubs.
5. Remove the wedge from the bushing split.
6. Using an accurate torque wrench, tighten each capscrew per numbered sequence given in Figure 5, alternately and evenly in one bushing only, applying no more pressure than recommended in the following table. Then, using the hammer and a heavy steel or bronze bar, drift on the face of the bushing starting opposite the split. Avoid drifting outside of the bolt circle to prevent damage to the bushing. Continue drifting in clockwise and counter clockwise directions from the point opposite the split around the bushings until you reach the specified torque on all capscrews. For JS and larger bushings, repeat this procedure until the specified torque no longer turns the capscrews after drifting.
7. Tighten the other bushing by the method described in step #6. When two bushings are used, complete tightening of one bushing before proceeding to the second.
8. Do not over tighten the capscrews. The bushing should not pull tight (bottom out) against the hub. Clearance must be maintained. Surfaces on both sides of the bushing split should be even, and the gap between the hub and bushings should be uniform at all locations. If the bushing flange contacts the face of the hub, check for undersized shafting.

Figure 5.2 Numbered Capscrew Sequence

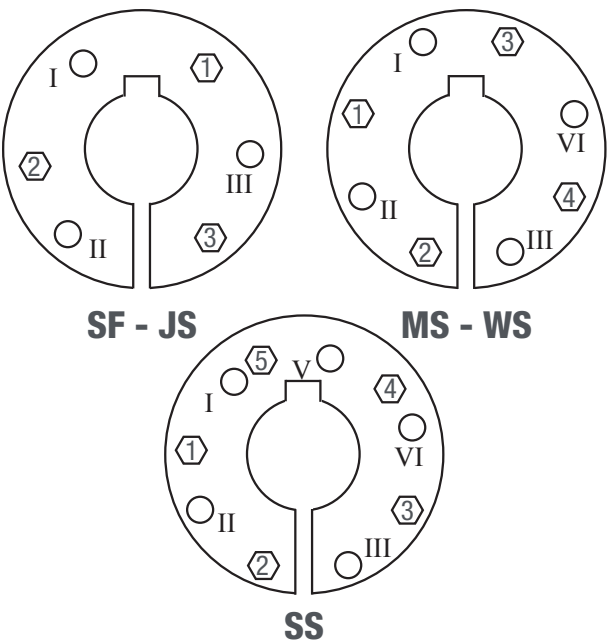


Table 8.2 Recommended QD Capscrew Torque

QD SIZE	NUMBER AND SIZE OF CAPSCREWS	SCREW TORQUE (IN-LBS.)
SDS	(QTY 3) 1/4 - 20 NC X 1-3/8	
SK	(QTY 3) 5/16 - 18 NC X 2	
SF	(QTY 3) 3/8 - 16 NC X 2	360
E	(QTY 3) 1/2 - 13 NC X 2-1/4	720
F	(QTY 3) 9/16 - 12 NC X 3-5/8	904
JS	(QTY 3) 5/8 - 11 NC X 2-1/2	1620
MS	(QTY 4) 3/4 - 10 NC X 3	2700
NS	(QTY 4) 7/8 - 9 NC X 3-1/2	3600
PS	(QTY 4) 1-8 - NC X 4-1/2	5400
WS	(QTY 4) 1-1/8 - 7 NC X 5	7200
SS	(QTY 5) 1-1/8 - 7 NC X 5	9000

BUSHING MAINTENANCE & REMOVAL

XT BUSHING MAINTENANCE AND BUSHING REMOVAL

Maintenance: before start up and once a week for the first month of operation, inspect the bushings and check the torque setting. After the first month of operation repeat inspection at periodic maintenance intervals.

Removal:

1. Remove all capscrews.
2. Insert capscrews into all threaded removal holes on bushings.
3. Tighten the capscrews alternately and evenly in one bushing only. Use the numbered sequence near the threaded removal holes in Figure 4, starting with 1 first, 2 second, etc., with all threaded holes being used until the bushing is loosened in the hub. If the bushing does not loosen immediately, tap on the bushing with a rubber mallet.
4. Remove the bushing from the shaft.
5. Remove the second bushing following steps 1-4.

QD BUSHING MAINTENANCE AND BUSHING REMOVAL

Maintenance: before start up and once a week for the first month of operation, inspect the bushings and check the torque setting. After the first month of operation repeat inspection at periodic maintenance intervals.

Removal:

1. Clean the exposed shaft ends.
2. Remove all capscrews.
3. Insert the capscrews into all threaded jacking screw holes in the bushing flange.
4. Turn the capscrews against the flange of the hub alternately and evenly in one bushing. A few turns on each screw should release the grip of the bushing on the shaft. Do not apply excessive torque on the jacking holes to the bushing split. If the bushing does not break loose, tap the bushing with a rubber mallet.
5. Remove the bushing from the shaft. If necessary, carefully insert a wedge in the bushing split to expand the bushing bore.
6. Repeat steps 1 through 5 for the other bushing.

PULLEY STRESS CONTRIBUTORS

VARIABLES

End disk bellows and bushing expansion are dependent on:

- Bushing/hub taper
- Manufacturing of hub/bushing system
- Bushing/hub installation alignment
- Assembler bolt torque
- Friction along shaft
- Friction along tapered surfaces
- Friction along threaded surfaces of bolts and holes

BELT TENSION

DRIVE WEIGHT

SELF WEIGHT

The highest contributors to stress have the highest variability, therefore highest risk to pulley reliability!

PULLEY STRESS ANALYSIS DIAGRAMS

The following diagrams indicate location of stress by each contributing source

SELF WEIGHT

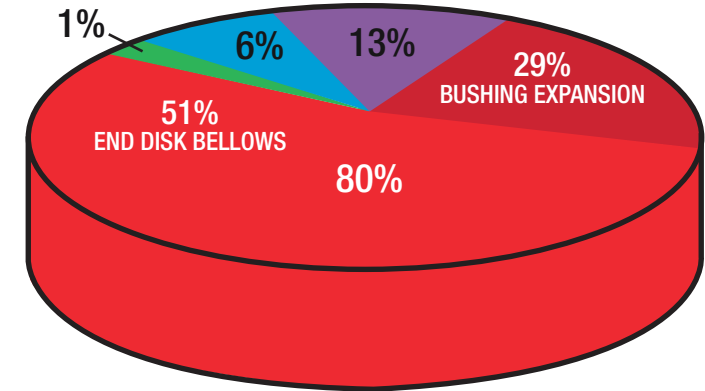
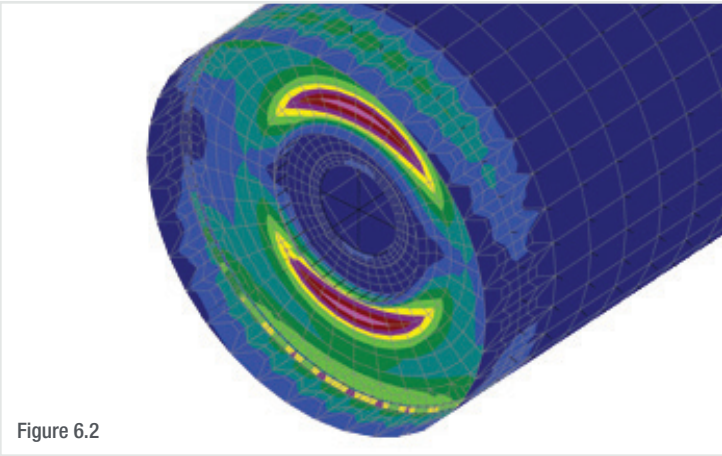


Figure 6.1

STRESS CONTRIBUTORS

- End Disk Bellows and Bushing Expansion
- Belt Tension
- Drive Weight
- Self Weight

DRIVE WEIGHT


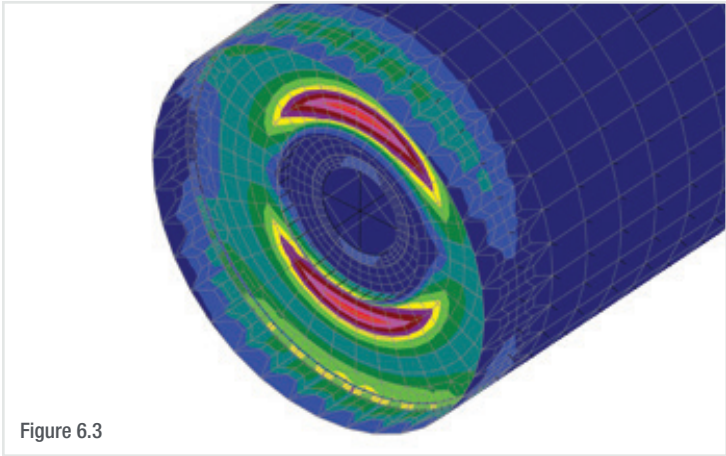


Figure 6.3

BELT TENSION

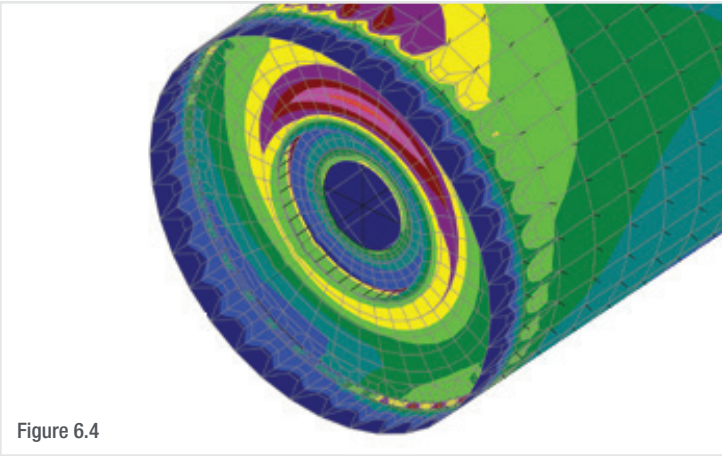

BUSHING EXPANSION AND END DISK BELLOWS

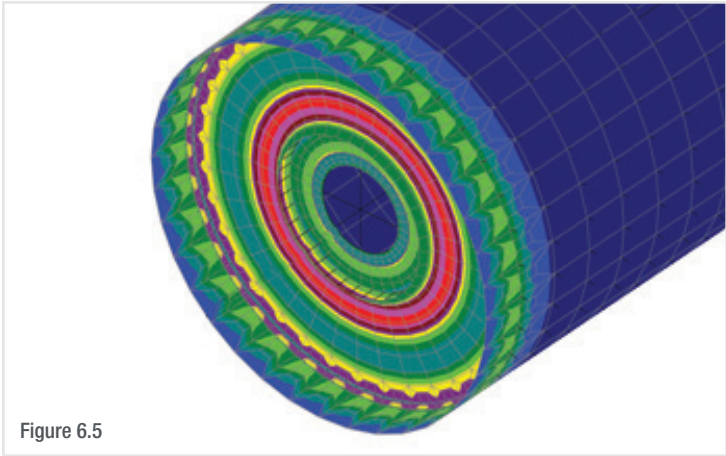


Figure 6.5

SHAFT WEIGHTS & ORDERING INFORMATION

Table 9.1

SHAFT LENGTH	WEIGHTS											
	SHAFT DIAMETER (INCHES)											
	1 3/16	1 7/16	1 15/16	2 3/16	2 7/16	2 15/16	3 7/16	3 15/16	4 7/16	4 15/16	5 7/16	5 15/16
1' 6"	5	6	13	17	23	36	48	64	79	100	117	143
2' 0"	9	10	19	28	30	44	64	81	104	129	161	186
2' 6"	11	13	26	30	43	60	80	107	133	165	195	237
3' 0"	12	18	31	36	45	66	95	124	158	195	237	282
3' 6"	15	21	34	47	54	82	110	145	184	228	276	329
4' 0"	17	25	39	50	63	94	126	166	210	260	316	377
4' 6"	18	27	43	59	69	106	142	186	237	293	355	424
5' 0"	21	30	49	62	77	113	158	207	263	326	395	471
5' 6"	24	32	54	68	84	125	173	228	289	358	434	518
6' 0"	25	35	61	75	96	139	189	248	315	391	474	565
6' 6"	27	37	64	81	105	152	205	269	342	423	513	612
7' 0"	29	40	69	90	110	163	221	290	368	456	553	659
7' 6"	30	42	77	99	118	175	237	311	394	488	592	706
8' 0"	32	47	83	103	125	186	252	331	420	521	632	753
8' 6"	35	48	88	107	134	197	268	352	447	553	671	800
9' 0"	36	53	93	116	141	205	284	373	473	586	711	847
9' 6"	39	55	96	119	153	220	300	393	500	618	750	894
10' 0"	41	57	101	125	160	228	315	414	526	651	790	941

ORDERING SHAFTING

When ordering shafting, specify the following:

- Diameter and Length
- Number and size of key ways required
- Length of shaft that extends beyond each end of the pulley
- Diameter and length of journal, if required
- Bearing centers

To order shafting, please copy and complete the sketch on page 11.

*Refer to page 11

SHAFT FORMULAS

Shaft Deflection Formula

$$\tan \varnothing = \frac{RA (B - 2A)}{4Eyl}$$

Where:

A = Moment arm for the pulley (inches)

B = Bearing centers (inches)

R = Resultant pulley load (pounds)

Ey= Youngs modulus in PSI (29 x 106 for steel)

I = Area moment of inertia of shaft in inches4 (.049087 d4)


D = Diameter of shaft

$\tan \varnothing$ = Tangent of the angle made by the deflected shaft and its neutral axis before bending at the pulley hub.

Allowable Slope:

$\tan \varnothing$ = .0023 inches per inch or tan of 8 minutes. If the slope is greater than .0023 it will be necessary to go to a larger shaft diameter or consult your manufacturer.

NOTE: THE RESULTANT DEFLECTION CALCULATED USING THESE FORMULAS WILL EXCEED THE ACTUAL DEFLECTION WHICH WILL DEPEND ON THE PULLEY CONSTRAINT.

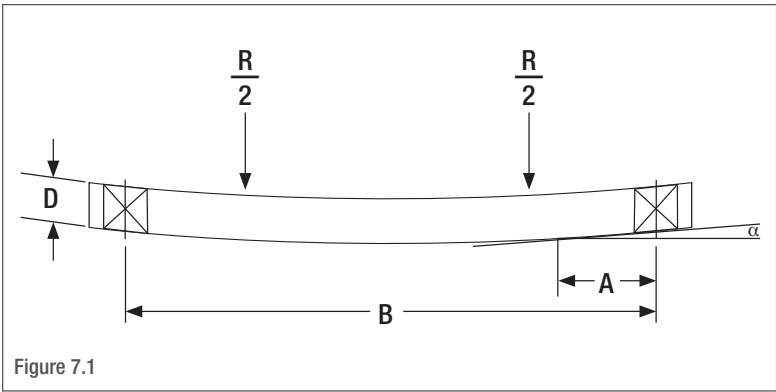

Shaft Stress Formula

$$D = \sqrt[3]{\frac{32FS}{\pi} \sqrt{\left(\frac{M}{Sf}\right)^2 + \frac{3}{4} \left(\frac{T}{Sy}\right)^2}}$$

For pulley and shaft applications within the scope of standard B105.1, the recommended values are:

F.S. = Factor of Safety = 1.5

Sf = Corrected shaft fatigue limit = ka kb kc kd ke kf kg • Sf*

Where:

ka = surface factor = 0.8 for machined shaft

kb = size factor = (D) -0.19

kc = reliability factor = 0.897

kd = temperature factor = 1.0 for -70° F to + 400° F

ke = duty cycle factor = 1.0 provided cyclic stresses do not exceed Sf*

kf = fatigue stress concentration factor =

STEEL	PROFIED KEYWAY	SLED RUNNER KEYWAY
Annealed (less than 200 BNH)	0.63	0.77
Quenched & Drawn (over 200 BNH)	0.50	0.63

kg = miscellaneous factor = 1.0 for normal conveyor service

Sf* = 29,000 psi for C1018

_ 41,000 psi for C1045

_ 47,500 psi for C4140 (annealed)

(Sf*= 0.5 tabulated ultimate tensile strength)

Sy = Yield strength = 32,000 psi for C1018

_____ 45,000 psi for C1045

_____ 60,500 psi for C140 (annealed)

M = Bending moment (inch-pounds) = RxA

_____ 2

T = Torsional moment (pound-inches)

=Te x r: where r = pulley radius

LAGGING WEIGHTS

WEIGHT INFORMATION – VULCANIZED RUBBER LAGGING WEIGHTS

Table 10.1 Crowned Drum

DIA.	LAGGING THICKNESS	WEIGHTS / FACE WIDTH (INCHES)										
		10	12	14	16	18	20	22	24	26	30	32
6"	1/4	3	3	4	4	5	6	7	7	8	10	10
	3/8	4	5	6	7	8	8	9	10	11	13	14
	1/2	5	6	8	9	10	11	12	14	15	17	19
8"	1/4	4	4	5	6	7	8	9	10	11	13	14
	3/8	5	6	7	9	10	11	12	14	15	18	19
	1/2	7	8	10	11	13	14	16	18	19	23	25
10"	1/4	4	5	6	7	8	10	11	12	13	16	17
	3/8	6	8	9	11	12	14	15	17	18	22	23
	1/2	8	10	12	14	16	18	20	22	24	28	30
12"	1/4	5	6	8	9	10	11	13	14	16	19	20
	3/8	8	9	11	13	14	16	18	20	22	26	28
	1/2	10	12	14	17	19	21	26	26	28	33	36
14"	1/4	6	7	9	10	12	13	15	16	18	22	23
	3/8	9	11	13	15	17	19	21	23	25	30	32
	1/2	12	14	17	19	22	25	27	30	33	39	42
16"	1/4	7	8	10	12	13	15	17	19	21	25	27
	3/8	10	12	14	17	19	21	24	26	29	34	37
	1/2	13	16	19	22	25	28	31	34	37	44	47
18"	1/4	8	9	11	13	15	17	19	21	23	28	30
	3/8	11	14	16	19	21	24	27	30	33	38	44
	1/2	15	18	21	25	28	31	35	38	42	49	53
20"	1/4	9	10	12	15	17	19	21	23	26	31	33
	3/8	13	15	18	21	24	27	30	33	36	43	46
	1/2	17	20	24	27	31	35	39	43	46	55	59
24"	1/4	10	13	15	17	20	22	25	28	31	37	40
	3/8	15	18	22	25	28	32	36	40	43	51	55
	1/2	20	24	29	33	37	42	46	51	56	65	70
30"	1/4	13	16	19	22	25	28	31	35	38	46	50
	3/8	19	23	27	31	35	40	44	49	54	63	68
	1/2	25	30	35	41	46	52	57	63	69	81	87
36"	1/4	15	19	22	26	28	34	38	42	46	55	59
	3/8	22	27	32	37	42	48	53	59	64	76	82
	1/2	29	36	42	49	55	62	69	76	83	97	105


DIA.	LAGGING THICKNESS	WEIGHTS / FACE WIDTH (INCHES)										
		36	38	40	44	46	51	54	57	60	63	66
6"	1/4	12	13	14	16	17	19	21	22	24	26	27
	3/8	17	18	19	21	23	26	28	30	32	34	36
	1/2	22	23	24	27	29	33	35	38	40	43	45
8"	1/4	16	17	18	21	22	25	27	29	31	34	36
	3/8	22	23	25	28	30	34	36	39	42	44	47
	1/2	28	30	32	36	38	43	46	49	52	55	59
10"	1/4	20	21	22	25	27	31	34	36	39	42	44
	3/8	27	29	31	35	37	42	45	48	51	55	58
	1/2	35	37	39	44	46	52	56	60	64	68	72
12"	1/4	23	25	27	30	32	37	40	43	46	50	53
	3/8	32	34	37	41	44	50	53	57	61	65	69
	1/2	41	44	47	52	55	62	67	72	76	81	86
14"	1/4	27	29	31	35	37	43	46	50	54	58	61
	3/8	37	40	42	48	50	57	62	66	71	76	80
	1/2	48	51	54	60	64	72	77	83	88	94	100
16"	1/4	31	33	35	40	43	49	53	57	61	66	70
	3/8	43	45	48	54	57	65	70	75	81	86	91
	1/2	54	58	61	69	73	82	88	94	100	107	113
18"	1/4	35	37	40	45	48	55	59	64	69	73	78
	3/8	48	51	54	61	64	73	79	85	90	96	102
	1/2	61	65	69	77	81	92	99	105	112	119	127
20"	1/4	39	41	44	50	53	61	66	71	76	81	87
	3/8	53	56	60	68	71	81	87	94	100	107	113
	1/2	67	72	76	85	90	102	110	117	124	132	140
24"	1/4	46	49	53	60	63	73	79	85	91	97	104
	3/8	63	67	72	81	85	97	104	112	120	128	136
	1/2	80	86	91	102	107	122	130	140	149	158	167
30"	1/4	57	62	66	75	79	91	98	106	113	121	130
	3/8	79	84	90	101	106	121	130	140	149	159	169
	1/2	100	107	113	127	134	151	162	174	185	196	208
36"	1/4	69	74	79	89	95	109	118	127	136	145	155
	3/8	94	101	107	120	127	145	156	167	178	190	202
	1/2	118	128	135	152	160	181	194	207	221	235	249

If grooved pulley (for 3/8" or 1/2" thickness) - take weight in chart and [Multiply by 0.95]

CONVEYOR DESIGN INFORMATION

Table 11.1 Characteristics of Common Bulk Materials

MATERIAL	WEIGHT (LB/FT³)	SURCHARGE ANGLE IN °	MAX. CONVEYING ANGLE IN °
Ashes, Coal, Dry, - 3"	35-40	25-30	22
Cement, Portland	90-100	25	20
Cement, Clinker	75-80	20	18
Coal, Arthracite, Sized, 3/8" - 6"	55	12	16
Coal, Bitum., Slack	50	22	22
Coal, Bitum., ROM	50	20	18
Coke, Loose	25-30	15	20
Earth, Common, Loam, Dry	70-80	15-30	20
Earth, Clay, Dry	100-120	10-30	20
Earth, Moist	80-100	30	22
Gravel, Average, Blended	90-100	15-20	18
Gravel, Sharp	90-100	25	20
Gravel, Rounded	90-100	15	15
Iron Ore	135	20	22
Limestone, Crushed	85-90	25-30	20
Phosphate Rock	75-85	25	20
Salt, Coarse, Dry	40-45	10	20
Salt, Fine, Dry	70-80	15	22
Sand, Bank, Damp	110-120	20-30	22
Sand, Bank, Dry	90-110	10-20	15
Sand, Foundry, Shakeout	90	25	20
Sand, Silica, Dry	90-100	10-20	15
Sand, Saturated	110-130	0-15	15
Shale, Crushed	85-90	25	20
Slag, Furnace, Crushed	85-90	12	18
Slate, Crushed, - 1/2"	80-90	15	20
Soda Ash, Light	25-35	22	20
Soda Ash, Heavy	55-65	17	20
Sulphur, Crushed, - 1/2"	50-65	20	20
Sulphur, Lumpy, - 3"	80-85	25	20
Wheat	45-48	8-15	16
Wood Chips	15-25	30	25

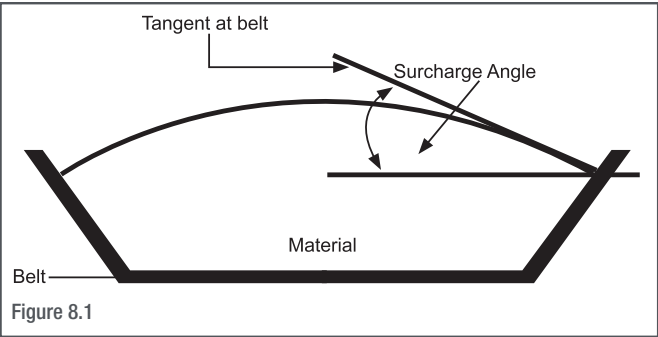

(1) All capacities shown are for material weighing 100 lbs. per cu. ft. and moving on belt 100fpm. For other weights, capacity equals table capacity.

$$\times \frac{\text{Wt./Cu. Ft.}}{100}$$

For other belt speeds, capacity equals table capacity (or calculated capacity).

$$\times \frac{\text{fpm}}{100}$$

(2) The surcharge angle is the angle formed between a horizontal line and a tangent to the material slope, both of which pass through the point where the slope meets the belt. Usually the surcharge angle is 10°-15° less than the angle of repose.

(3) "Mixed with 50% fines" means at least half of the material must be less than one half the maximum material size.

Table 11.2 Max Recommended Belt Speeds

MATERIAL BEING CONVEYED	BELT SPEEDS (FPM)	BELT WIDTH (INCHES)
Grain or other free-flowing, nonabrasive material	400	18
	600	24-30
	800	36-42
	1000	48-96
Coal, damp clay, soft ores, overburden and earth, fine-crushed stone	600	18
	800	24-36
	1000	42-60
	1200	72-96
Heavy, hard, sharp-edged ore, coarse-crushed stone	400	18
	600	24-36
	800	Over 36
Foundry sand, prepared or damp; shakeout sand with small cores, with or without small castings (not hot enough to harm belting)	350	Any Width
Prepared foundry sand and similar damp (or dry abrasive) materials discharged from belt by rubber-edged plows	200	Any Width
Nonabrasive materials discharged from belt by means of plows -except wood pulp, where 300 to 400 preferable	200	Any Width
Feeder belts, flat or troughed, for feeding fine, nonabrasive, or mildly abrasive materials from hoppers and bins.	50 to 100	Any Width

Table 11.3 Suggested Spacing of Troughing Idlers

BELT WIDTH (INCHES)	WEIGHT OF MATERIAL HANDLED (LB/FT³)						RETURN IDLERS
	30	50	75	100	150	200	
18	5.5	5.0	5.0	5.0	4.5	4.5	10.0
24	5.0	4.5	4.5	4.0	4.0	4.0	10.0
30	5.0	4.5	4.5	4.0	4.0	4.0	10.0
36	5.0	4.5	4.0	4.0	3.5	3.5	10.0
42	4.5	4.5	4.0	3.5	3.0	3.0	10.0
48	4.5	4.0	4.0	3.5	3.0	3.0	10.0
54	4.5	4.0	3.5	3.5	3.0	3.0	10.0
60	4.0	4.0	3.5	3.0	3.0	3.0	10.0
72	4.0	3.5	3.5	3.0	2.5	2.5	8.0
84	3.5	3.5	3.0	2.5	2.5	2.0	8.0
96	3.5	3.5	3.0	2.5	2.0	2.0	8.0

Table 11.4 Maximum Belt Capacities

BELT WIDTH (IN.)	TROUGH ANGLE	MAX. BELT CAPACITY (TPH) SURCHARGE ANGLE					MAX. MATERIAL (INCHES) FOR 20° SURCHARGE	
		5°	10°	20°	25°	30°	ALL LUMPS UNIFORM SIZE	MIXED 10% LUMPS 90% FINES
18	20°	-	-	50	56	63	4	4
	35°						Not Recommended	
	45°						Not Recommended	
24	20°	-	-	96	108	120	5	7
	35°	-	-	102	122	132	5	7
	45°	106	115	132	140	170	5	7
30	20°	-	-	157	175	195	6	10
	35°	-	-	167	200	215	6	10
	45°	175	187	215	230	244	6	10
36	20°	-	-	230	260	290	7	12
	35°	-	-	248	295	318	7	12
	45°	258	278	318	340	360	7	12
42	20°	-	-	320	360	400	8	14
	35°	-	-	344	408	442	8	14
	45°	358	386	440	470	500	8	14
48	20°	-	-	430	480	530	10	16
	35°	-	-	457	540	630	10	16
	45°	475	510	584	623	660	10	16

CONVEYOR DESIGN INFORMATION

VOLUMES OF CONICAL AND CIRCULAR SHAPED STOCKPILES

Figure 9.1

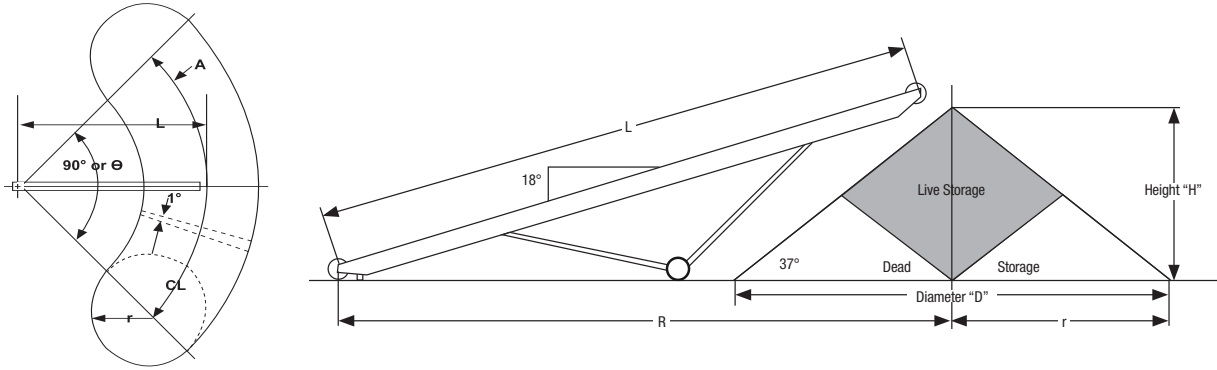


Table 11.5

DIMENSIONS IN FEET				CONICAL PILE VOLUME		VOLUME FOR ONE DEGREE ARC		90° STOCKPILE VOLUME	
L	R	H	R	C.Y.	TONS	C.Y.	TONS	C.Y.	TONS
40	39	14	19	196	265	6.5	8.8	781	1,057
50	48.5	17.5	23	359	485	12.8	17.3	1,511	2,042
60	58	20.5	27	580	783	21	28.4	2,470	3,339
70	67.5	24.5	32.5	1,004	1,355	35	47	4,154	5,585
80	77	27.5	36.5	1,421	1,918	50.2	67.8	5,939	8,020
90	87.5	30	40	1,872	2,527	68	91.6	1,992	10,771
100	96.5	32.5	43	2,331	3,145	87.8	118.6	10,233	13,819
110	105.5	35.5	47	2,058	4,128	114.6	154.7	13,372	18,051
120	115.5	38.5	51	3,884	5,243	147.6	199.2	17,168	23,171
130	125	41.5	55	4,896	6,610	185.6	250.5	21,600	29,155
140	134.5	44.5	59	6,041	8,156	229.6	310	26,705	36,056
150	144	47.5	63	7,312	9,871	280	378	32,512	43,891
170	162	54	72	10,670	14,400	400	540	46,820	63,210
190	181	60	80	14,800	20,000	560	760	65,000	87,800

Calculated volumes are in cubic yards.

Tons are based on 100 lbs. per. Cu. Ft. material, conveyor incline 18 stockpile angle of repose 37. Live storage at center of pile is theoretically 25 % of the total volume.

1. Volume of conical pile = V_1

Where radius of pile (r) and height of pile (H) are known: $V_1 = r^2 H (.039)$

Where height of pile (H) and slant length of side of pile (s) are known: $V_1 = H (S^2 - H^2) (.039)$

Where slant length of side of pile (s) and angle of repose θ are known: $V_1 = S^3 (\cos \theta)^2 \sqrt{1 - (\cos \theta)^2} (.039)$

Where height of pile (H) and angle of repose (θ) are known: $V_1 = \frac{H^3 (.039)}{\tan^2 (\theta)}$

2. Volume of a 1° arc segment of stockpile = V_2

a. Where height of pile (H), distance between center line of pile and center line of conveyor pivot (R) are known, and angle of repose θ is

$$\text{equal to } 37^\circ V_2 = \frac{H^2 R}{1160}$$

b. For other angles of repose $V_2 = \frac{H^2 R}{(1547)(\tan \theta)}$

3. Degrees of arc of stockpile with known arc lengths = θ Where diameter of stockpile (D) and arc length (A) are known: $= \frac{(114.6) A}{D}$

CONVEYOR DESIGN INFORMATION

LIFT (FT) BASED ON ACTUAL PULLEY CENTER TO CENTER DISTANCE

Figure 10.1

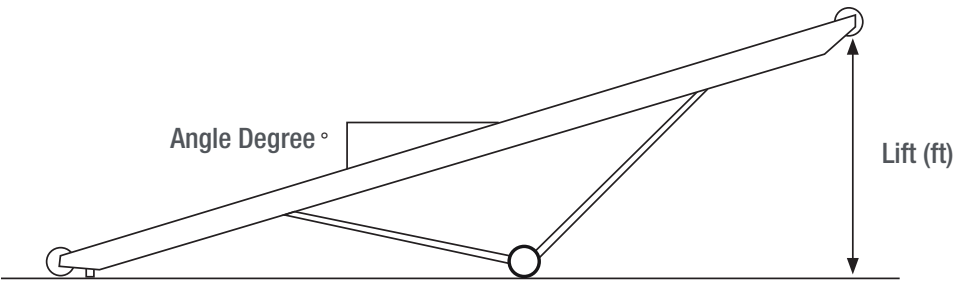


Table 11.6

ANGLE DEGREES	LENGTH OF CONVEYOR (FT)														LIFT (ft)
	10	20	30	40	50	60	70	80	90	100	120	140	160	180	
2					2	2	2	3	3	4	4	5	6	6	LIFT (ft)
4			2	3	4	4	5	6	6	7	8	10	12	13	
6		2	3	4	5	6	7	8	9	11	13	15	17	19	
8		3	4	5	7	8	9	10	12	14	17	19	22	25	
10	2	3	5	7	9	10	12	14	16	17	21	24	28	31	
12	2	4	6	8	10	12	15	17	19	21	25	29	33	37	
14	2	5	7	10	12	15	17	19	22	24	29	34	39	44	
16	3	6	8	11	14	17	19	22	25	28	33	39	44	50	
18	3	6	9	12	15	19	22	25	28	31	37	43	49	56	
20	3	7	10	14	17	21	24	27	31	34	41	48	55	62	
22	4	7	11	15	19	22	26	30	34	37	45	52	60	67	
24	4	8	12	16	20	24	28	33	37	41	49	57	65	73	

ANGLE DEGREES	LENGTH OF CONVEYOR (FT)														LIFT (ft)
	200	225	250	275	300	350	400	450	500	600	700	800	900	1000	
2	7	8	9	10	11	12	14	16	18	21	25	28	32	35	LIFT (ft)
4	14	16	18	19	21	25	28	32	35	42	49	56	63	70	
6	21	24	26	29	32	37	42	47	53	63	74	84	95	105	
8	28	31	35	38	42	49	56	63	70	83	97	111	125	139	
10	35	39	43	48	52	61	70	78	87	104	121	139	157	174	
12	42	47	52	57	62	73	83	94	104	125	146	166	187	208	
14	48	54	61	67	73	85	97	109	121	145	169	194	218	-	
16	55	62	69	76	83	97	110	124	138	166	193	221	-	-	
18	62	69	77	85	93	108	124	139	155	185	216	-	-	-	
20	68	77	86	94	103	120	137	154	171	205	-	-	-	-	
22	75	84	94	103	113	131	150	169	188	225	-	-	-	-	
24	81	92	102	122	142	142	163	183	203	-	-	-	-	-	

Hard time understanding this chart? Take the angle degrees on the left-hand side and line it up with the length of conveyor on top to get your lift in feet measurement.

CONVEYOR DESIGN INFORMATION

CONVEYOR HORSEPOWER

The sum of factors X + Y + Z (from tables below) = total horsepower at headshaft. A 10% increase in total horsepower is required for friction loss. If Z factors exceeds ½ the sum of X + Y factors, a backstop is usually necessary. Factor Z is not required for horizontal conveyors.

FACTOR X - HP REQUIRED AT HEADSHAFT FOR EMPTY CONVEYOR @ 100 FPM

Table 11.7

BELT WIDTH	CENTER TO CENTER LENGTH IN FEET															
	25	50	75	100	150	200	250	300	350	400	450	500	550	600	650	700
18"	0.2	0.3	0.3	0.3	0.4	0.4	0.45	0.5	0.55	0.6	0.65	0.7	0.8	0.9	0.95	1
24"	0.3	0.3	0.35	0.4	0.6	0.6	0.68	0.7	0.78	0.8	0.9	1	1.08	1.1	1.2	1.3
30"	0.4	0.5	0.55	0.6	0.8	0.8	0.9	1	1.1	1.2	1.3	1.4	1.6	1.7	1.8	1.9
36"	0.5	0.6	0.7	0.8	1	1	1.2	1.3	1.4	1.5	1.7	1.8	1.9	2	2.1	2.2
42"	0.7	0.8	0.83	0.9	1.1	1.3	1.5	1.5	1.8	1.9	2.1	2.2	2.4	2.5	2.7	2.8
48"	0.8	0.9	1	1.1	1.3	1.5	1.7	1.7	2	2.2	2.4	2.6	2.8	2.9	3.1	3.3

FACTOR Y - HP REQUIRED TO MOVE MATERIAL AT ANY SPEED HORIZONTALLY

Table 11.8

TPH	CENTER TO CENTER LENGTH IN FEET															
	25	50	75	100	150	200	250	300	350	400	450	500	550	600	650	700
50	0.25	0.3	0.32	0.35	0.4	0.45	0.5	0.6	0.65	0.7	0.75	0.8	0.85	0.9	0.95	1
100	0.5	0.6	0.65	0.7	0.8	0.9	1	1.1	1.2	1.3	1.5	1.6	1.7	1.8	1.9	2
150	0.75	0.8	0.9	1	1.2	1.3	1.5	1.7	1.9	2	2.2	2.3	2.5	2.7	2.9	3
200	1	1.1	1.2	1.3	1.5	1.8	2	2.2	2.4	2.7	2.9	3.1	3.3	3.6	3.8	4
250	1.3	1.4	1.6	1.7	1.9	2.3	2.5	2.7	3	3.4	3.7	3.9	4.2	4.5	4.8	5
300	1.5	1.7	1.9	2	2.3	2.7	3	3.3	3.7	4	4.4	4.7	5	5.3	5.7	6
350	1.7	2	2.2	2.4	2.7	3.1	3.6	3.9	4.3	4.7	5.1	5.5	5.9	6.2	6.6	7
400	2	2.2	2.5	2.7	3.2	3.6	4.1	4.4	4.9	5.3	5.8	6.2	6.7	7.1	7.6	8
450	2.3	2.5	2.8	3	3.5	4	4.6	5	5.6	6	6.5	7	7.5	8	8.5	9
500	2.5	2.8	3.1	3.3	3.8	4.4	5	5.6	6.2	6.7	7.3	7.8	8.4	8.9	9.5	10
600	3	3.3	3.7	4	4.6	5.3	6	6.7	7.4	8	8.7	9.3	10	10.7	11.4	12
700	3.5	3.9	4.3	4.7	5.4	6.2	7	7.8	8.6	9.3	10.2	10.9	11.7	12.4	13.2	14
800	4	4.4	4.9	5.3	6.2	7.1	8	8.9	9.8	10.7	11.6	12.4	13.4	14.2	15.2	16
900	4.5	5	5.5	6	6.9	8	9	10	11	12	13	14	15	16	17	18
1000	5.1	5.6	6.2	6.7	7.7	8.9	10	11.1	12.3	13.3	14.5	15.6	16.7	17.8	18.9	20

FACTOR Z - HP REQUIRED TO LIFT OR DROP MATERIAL AT ANY SPEED VERTICALLY

Table 11.9

TPH	VERTICAL LIFT OR DROP IN FEET															
	5	10	15	20	25	30	35	40	45	50	55	60	70	80	90	100
50	0.3	0.5	0.8	1	1.3	1.5	1.8	2	2.3	2.5	2.8	3	3.5	4	4.6	5.1
100	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5.1	5.6	5.1	7.1	8.1	9.1	10.1
150	0.8	1.5	2.3	3	3.8	4.5	5.3	6.1	6.9	7.6	8.4	9.1	10.6	12.1	13.7	15.2
200	1	2	3	4	5.1	6.1	7.1	8.1	9.1	10.1	11.1	12.1	14.2	16.2	18.1	20
250	1.3	2.5	3.8	5.1	6.3	7.6	8.9	10.1	11.4	12.6	13.9	15.2	17.6	20	23	25
300	1.5	3	4.5	6.1	7.6	9.1	10.6	12.1	13.7	15.2	16.7	18.2	21.1	24	27	30
350	1.8	3.5	5.3	7.1	8.8	10.6	12.3	14.1	15.9	17.7	19	21	25	28	32	35
400	2	4	6.1	8.1	10.1	12.1	14.1	16.2	18	20	22	24	28	32	36	40
450	2.3	4.5	6.8	9.1	11.4	13.6	15.9	18.2	21	23	25	27	32	36	41	45
500	2.5	5.1	7.6	10.1	12.6	15.2	18	20	23	25	28	30	35	40	46	51
600	3	6.1	9.1	12.1	15.2	18.2	21	24	27	30	33	36	42	48	55	61
700	3.5	7.1	10.6	14.1	17.7	21	25	28	32	35	39	42	50	57	64	71
800	4	8.1	12.1	16.2	20	24	28	32	36	40	44	48	57	65	73	81
900	4.5	9.1	13.6	18.2	23	27	31	36	40	45	50	55	64	73	82	91
1000	5.1	10.1	15.2	20	25	30	35	40	46	51	56	61	71	81	91	101.2

CONVEYOR DESIGN INFORMATION

ELECTRICAL FORMULAS

Table 11.10

TO FIND	ALTERNATING CURRENT		TO FIND	ALTERNATING OR DIRECT CURRENT
	SINGLE-PHASE	THREE-PHASE		
Amperes when horsepower is known	$\frac{Hp \times 746}{E \times Eff \times pf}$	$\frac{Hp \times 746}{1.73 \times E \times Eff \times pf}$	Amperes when voltage and resistance is known	$\frac{E}{R}$
Amperes when kilowatts are known	$\frac{Kw \times 1000}{E \times pf}$	$\frac{Kw \times 1000}{1.73 \times E \times pf}$	Voltage when resistance and current are known	IR
Amperes when Kva are known	$\frac{Kva \times 1000}{E}$	$\frac{Kva \times 1000}{1.73 \times E}$	Resistance when voltage and current are known	$\frac{E}{I}$
Kilowatts	$\frac{1 \times E \times pf}{1000}$	$\frac{1.73 \times 1 \times E \times pf}{1000}$	<div>All Values At 100% Load</div> <div>GENERAL INFORMATION (Approximation) At 1800 rpm, a motor develops 36 lb-in per hp At 1200 rpm, a motor develops 54 lb-in per hp At 575 volts, a 3-phase motor draws 1 amp per hp At 460 volts, a 3-phase motor draws 1.25 amp per hp At 230 volts, a 3-phase motor draws 2.5 amp per hp At 230 volts, a single-phase motor draws 5 amp per hp At 115 volts, a single-phase motor draws 10 amp per hp</div> <div>TEMPERATURE CONVERSION: Deg C = (Deg F - 32) x 5/9 Deg F = (Deg C x 9/5) + 32</div>	
Kva	$\frac{1 \times E}{1000}$	$\frac{1.73 \times 1 \times E}{1000}$		
Horsepower = (Output)	$\frac{1 \times E \times Eff \times pf}{746}$	$\frac{1.73 \times 1 \times E \times Eff \times pf}{746}$		

I = Amperes; E = Volts; Eff = Efficiency; pf = power factor; Kva = Kilovolt amperes; Kw = Kilowatts; R = Ohms.

AC MOTOR RECOMMENDED WIRE SIZE

Table 11.11

VOLTS	MOTOR HORSEPOWER																					
	1-3	5	7.5	10	15	20	25	30	40	50	60	75	100	125	150	200	250	300	350	400	450	500
230	14	12	10	8	6	4	3	1	0	0	0	300	500	0	300	500	700	900	1500	600*	750*	900*
460	14	14	14	12	10	8	6	6	4	3	2	0	0	0	0	250	500	600	800	1000	1500	600*
575	14	14	14	14	12	10	8	6	6	4	3	2	0									
2300																	6	4	3	2	1	1

*Parallel, use high voltage cable

MOTOR AMPS (A FULL LOAD †)

Table 11.12

HP	ALTERNATING CURRENT		DC	HP	ALTERNATING CURRENT		DC	HP	ALTERNATING CURRENT		DC	HP	ALTERNATING CURRENT		DC
	SINGLE PHASE	THREE PHASE			SINGLE PHASE	THREE PHASE			SINGLE PHASE	THREE PHASE			SINGLE PHASE	THREE PHASE	
1/2	4.9	2	2.7	5	28	14.4	20	25		60	92	75		180	268
1	8	3.4	4.8	7-1/2	40	21	29	30		75	110	100		240	355
1-1/2	10.1	4.8	6.6	10	50	26	38	40		100	146	125		300	443
2	12	6.2	8.5	15		38	56	50		120	180	150		360	534
3	17	8.6	12.5	20		50	74	60		150	215	200		480	712

† Values are for all speeds and frequencies (a 230 volts.)
Amperage other than 230 volts can be figured:

$$V = \frac{230 \times \text{Amp from table}}{\text{New voltage}}$$

Example: For 60 hp 3 phases (a 550 volts $\frac{230 \times 150}{550} = 62$ Amps
Power factor estimated (80% for most motors) Efficiency is usually 80-90%.

NEMA ELECTRICAL ENCLOSURE TYPES

Table 11.13

TYPE	DESCRIPTION	TYPE	DESCRIPTION
NEMA Type 1 (General Purpose)	For indoor use wherever oil, dust or water is not a problem.	NEMA Type 5 Dust Tight (Non-Hazardous)	Used for excluding dust. (All NEMA 12 and JIC enclosures are usually suitable for NEMA 5 use.)
NEMA Type 2 (Driptight)	Used indoors to exclude falling moisture and dust.	NEMA Type 9 Dust Tight (Hazardous) ‡	For locations where combustible dusts are present.
NEMA Type 3 (Weatherproof)	Provides protection against rain, sleet and snow.	NEMA Type 12 (Industrial Use)	Used for excluding oil, coolant, flying dust, lint, etc.
NEMA Type 4 (Watertight) †	Needed when subject to great amounts of water from any angle (such as areas which are repeatedly hosed down).		

Note: Joint Industry Conference (JIC) enclosures are similar in design to NEMA 12's.
For complete details see NEMA or JIC Standards for enclosures.

† Not designed to be submerged.
‡ Class II Groups E,F, and G.

CONVEYOR DESIGN INFORMATION

CONVEYOR BELT TROUBLESHOOTING GUIDE

Table 11.14

PROBLEM	PROBABLE CAUSES - FROM MOST LIKELY TO LEAST								PROBLEM	PROBABLE CAUSES - FROM MOST LIKELY TO LEAST							
Belt runs off at tail pulley	7	14	15	17	20	-	-	-	Excessive bottom cover wear	20	15	5	19	21	22	9	-
Belt runs off at all points of the line	25	17	14	20	3	16	-	-	Excessive edge wear, broken edges	25	3	17	9	1	20	2	-
One belt section runs off at all points of the line	2	11	1	-	-	-	-	-	Excessive top over wear, gouges, rips, ruptures, and tears	12	24	17	15	9	5	-	-
Belt runs off the head pulley	14	22	20	16	-	-	-	-	Cover swells or softens in spots	9	-	-	-	-	-	-	-
Belts runs to one side throughout the entire length at specific idlers	14	16	20	-	-	-	-	-	Longitudinal grooving or cracking of top cover	26	15	20	12	-	-	-	-
Belts slips	19	7	20	15	22	-	-	-	Cover checked or brittle	9	-	-	-	-	-	-	-
Belt slips on starting	19	7	22	10	-	-	-	-	Belt hardens or cracks	9	23	22	-	-	-	-	-
Excessive belt stretch	13	10	20	6	8	9	-	-	Longitudinal grooving or cracking of bottom cover	15	20	22	-	-	-	-	-
Belt breaks at or behind fasteners, or fasteners tear loose	2	23	13	22	21	10	6	8	Fabric decay, carcass cracks, gouges, ruptures, soft spots	12	21	5	10	9	-	-	-
Vulcanized splice separation	23	10	20	14	19	2	-	-	Ply separation	13	23	11	9	4	-	-	-

- BELT BOWED:** Avoid telescoping belt rolls or storing them in damp locations. A new belt should straighten out when “broken in” or complete system must be reinspected.
- BELT IMPROPERLY SPLICED OR WRONG FASTENERS:** Use fasteners recommended by the manufacturer. Retighten after running for a short while. If improperly spliced remove old splice and resplice. Set up regular inspection schedule.
- BELT STRAINED** (or elongated on one side): Allow enough time for new belt to “break in”. If belt does not break in properly or is not new, remove strained section and splice in new piece.
- BELT SPEED TOO FAST:** Reduce speed.
- BREAKER STRIP MISSING OR INADEQUATE:** When service is lost, install belt with proper breaker strip.
- COUNTERWEIGHT TOO HEAVY:** Recalculate weight and adjust counterweight accordingly. Reduce take-up tension to point of slippage; retighten slightly.
- COUNTERWEIGHT TOO LIGHT:** Recalculate weight and adjust counter weight or screw take-up accordingly.
- DIFFERENTIAL SPEED WRONG ON DUAL PULLEYS:** Make necessary adjustment and observe operation closely.
- DAMAGE BY ACIDS, CHEMICALS, OILS, OR DETERIORATION BY ABRASIVES, HEAT OR MILDEW:** Use belt designed for specific condition. For abrasive materials working into cuts and piles, repair with cold pack or with permanent repair patch. Seal metal fasteners or replace with vulcanized step splice. Enclose belt line for protection against rain, snow, or sun. Do not over lubricate idlers.
- DRIVE UNDERBELTED:** Recalculate maximum belt tensions and select correct belt. If line is over-extended, consider using two flight system with transfer point. If carcass is not rigid enough for load, install belt with proper flexibility when service is lost.
- EDGE WORN OR BROKEN:** (permitting moisture penetration and belt shrinkage on one side): Repair belt edge. Remove badly worn or out-of-square section and splice in new piece of belt.
- EXCESSIVE IMPACT OF MATERIAL ON BELT OR FASTENERS:** Use correctly designed chutes and baffles. Make vulcanized splices. Install impact idlers. Where possible, load fines first. Where material is trapped under skirts, adjust skirtboards to minimum clearance or install cushioning idlers to hold belt against skirts.
- EXCESSIVE TENSION:** Recalculate and adjust tension. Use vulcanized splice with recommended limits.
- IDLERS OR PULLEY SHAFT OUT OF SQUARE WITH CENTER LINE OF CONVEYOR:** Realign and install limit switches for greater safety. Check conveyor manufacturer's manual or guide.
- IDLERS FROZEN:** Free the idlers; then lubricate, but don't overdo it.
- IMPROPERLY PLACED IDLERS:** Relocate idlers or insert additional idlers spaced to support belt.
- IMPROPER LOADING:** Feed should be in direction of belt travel and at belt speed, centered on the belt. Control flow with feeders, chutes and skirtboards.
- IMPROPER STORAGE OR HANDLING:** Contact your representative for storage and handling tips.
- INSUFFICIENT TRACTION BETWEEN BELT AND PULLEY:** Increase wrap with snub pulleys. Lag drive pulley. In wet conditions use grooved lagging. Install correct cleaning devices on belt and centrifugal switch for safety.
- MATERIAL BUILD-UP** (on pulleys and idlers): Remove accumulation and install cleaning devices, scrapers, and inverted “V” decking.
- MATERIAL FALLING BETWEEN BELT AND PULLEY:** Use skirtboards properly. Remove accumulation.
- PULLEY LAGGING WORN:** Replace worn pulley lagging. Use grooved lagging for wet conditions. Repair loose bolts protruding.
- PULLEYS TOO SMALL:** Go to a larger diameter.
- RELATIVE LOADING VELOCITY TOO HIGH OR TOO LOW:** Adjust chutes or belt speed. Consider use of impact idlers. Observe operation closely.
- SIDE LOADING:** Load in direction of belt travel.
- SKIRTS INCORRECTLY PLACED:** Install skirtboards so that they do not rub against belt.

CONVEYOR DESIGN INFORMATION

DECIMAL AND METRIC EQUIVALENTS

Table 11.15

FRACTIONS OF AN INCH	EQUIVALENTS		FRACTIONS OF AN INCH	EQUIVALENTS	
	INCHES	MILLIMETERS		INCHES	MILLIMETERS
1/64	0.015625	0.396875	33/64	0.515625	13.096875
1/32	0.03125	0.79375	17/32	0.53125	13.49375
3/64	0.046875	1.190625	35/64	0.546875	13.890625
1/16	0.0625	1.5875	9/16	0.5625	14.2875
5/64	0.078125	1.984375	37/64	0.578125	14.684375
3/32	0.09375	2.38125	19/32	0.59375	15.08125
7/64	0.109375	2.778125	39/64	0.609375	15.478125
1/8	0.125	3.175	5/8	0.625	15.875
9/64	0.140625	3.571875	1/4	0.640625	16.271875
5/32	0.15625	3.96875	21/32	0.65625	16.66875
11/64	0.171875	4.365625	43/64	0.671875	17.065625
3/16	0.1875	4.7625	11/16	0.6875	17.4625
13/64	0.203125	5.159375	45/64	0.703125	17.859375
7/32	0.21875	5.55625	23/32	0.71875	18.25625
15/64	0.234375	5.953125	47/64	0.734375	18.653125
1/4	0.25	6.35	3/4	0.75	19.05
17/64	0.265625	6.746875	49/64	0.765625	19.446875
9/32	0.28125	7.14375	25/32	0.78125	19.84375
19/64	0.296875	7.540625	51/64	0.796875	20.240625
5/16	0.3125	7.9375	13/16	0.8125	20.6375
21/64	0.328125	8.334375	53/64	0.828125	21.034375
11/32	0.34375	8.73125	27/32	0.84375	21.43125
23/64	0.359375	9.128125	55/64	0.859375	21.828125
3/8	0.375	9.525	7/8	0.875	22.225
25/64	0.390625	9.921875	57/64	0.890625	22.621875
13/32	0.40625	10.31875	29/32	0.90625	23.01875
27/64	0.421875	10.715625	59/64	0.921875	23.415625
7/16	0.4375	11.1125	15/16	0.9375	23.8125
29/64	0.453125	11.509375	61/64	0.953125	24.209375
15/32	0.46875	11.90625	31/32	0.96875	24.60625
31/64	0.484375	12.303125	63/64	0.984375	25.003125
1/2	0.5	12.7	1	1	25.4

CONVEYOR BELT SPEEDS – PULLEY REVOLUTIONS PER MINUTE & FORMULAS

Table 11.16

DIA. OF PULLEY (INCHES)	PULLEY CIRCUMFERENCE (FEET)	BELT SPEEDS IN FEET PER MINUTE								
		100	150	200	250	300	350	400	500	600
		PULLEY REVOLUTIONS PER MINUTE								
12	3.14	31.8	47.7	63.7	79.6	95.6	111.4	127.3	159.2	191
14	3.67	27.2	40.8	54.5	68.2	81.7	95.5	109.1	136.4	163.7
16	4.18	23.9	35.8	47.8	59.8	71.8	85	95.5	119.4	143.2
18	4.72	21.1	31.8	42.4	53	63.6	74.2	84.9	106.1	127.3
20	5.24	19.1	28.6	38.2	47.7	57.2	66.8	76.4	95.5	114.6
24	6.28	16	23.9	31.9	39.8	47.8	55.7	63.7	79.7	95.5
26	6.8	14.7	22	29.4	36.7	44.2	51.5	58.8	73.5	88.1
28	7.32	13.7	20.5	27.3	34.2	41	47.8	54.7	68.3	81.9
30	7.85	12.7	19.1	25.5	31.8	38.2	44.6	51	63.7	76.4
32	8.37	11.9	17.9	23.9	29.8	35.8	41.8	47.7	59.7	71.6
36	9.42	10.6	15.9	21.2	26.5	31.8	37.2	42.5	53	63.7

PULLEY APPLICATION FORMULAS

Table 11.17

TO OBTAIN	HAVING	FORMULA
Belt speed feet per minute	Diameter (D) of pulley inches and revolutions per minute (RPM)	$S = .2618 \times D \times \text{RPM}$
Shaft speed revolutions per minute (RPM)	Velocity (S) ft. per minute and diameter (D) of pulley inches	$\text{RPM} = \frac{S}{.2618 \times D}$
Diameter (D) of pulley inches	Velocity (S) ft. per minute and revolutions per minute (RPM)	$D = \frac{S}{.2618 \times \text{RPM}}$
Torque (T) In. (Lbs.)	Force (W) lbs. and radius (R) inches	$T = W \times R$

TERMS AND CONDITIONS

SUPERIOR INDUSTRIES, LLC (d/b/a Superior Equipment and as Superior Components)

1. **OFFER AND ACCEPTANCE.** Superior Industries, LLC's ("Seller") acceptance of Buyer's order to purchase products is expressly made conditional on assent to these Terms and Conditions, which along with the Sales Order constitute a binding "Contract" between the parties. This Contract constitutes the complete and final agreement between Seller and Buyer for the products. Any additional or different terms or conditions contained in any document furnished by Buyer, including but not limited to, any purchase order or any acknowledgment, are deemed to be material and are hereby objected to and rejected by Seller. If such agreement shall be deemed an offer or counter-offer by Buyer, Seller expressly rejects such offer or counter-offer and limits acceptance to these Contract terms and expressly objects to any different or additional terms proposed by Buyer. Any actual performance by Buyer or Seller thereafter shall be deemed a renewal of the offer contained in this Contract and acceptance of this Contract without change. In the event of a conflict between the terms of this Contract and the terms of any other document, the terms of this Contract shall control. This offer to purchase Seller's products is valid for thirty (30) days from the date of the Sales Order.

2. **PAYMENT TERMS.** All prices specified in this Contract are FOB Seller's designated location which constitutes delivery. All risk of damage to or loss of the products from any cause whatsoever shall pass to Buyer upon delivery, even if Seller arranges for shipment of the product. Unless otherwise expressly provided on the reverse hereof, payment shall be made within thirty (30) days from the earlier of the date of delivery or the date of an invoice, without discount. Any discount which may be expressly provided on the reverse hereof applies to the sale price of the products at the shipping point, and does not apply to any charges made for taxes, storage, loading or transportation. All payments shall be made in United States dollars. Interest will be charged at the rate of eighteen percent (18%) per annum, or the maximum interest rate allowable by applicable law, whichever is lower, on all unpaid invoices. Buyer shall pay all taxes and charges of any nature imposed by any federal, state, or local governmental authority by reason of the sale or delivery of the products whether levied or assessed against Seller, Buyer, or the products. Such applicable taxes or charges, if not included in this Contract, shall be invoiced separately. If, in Seller's opinion, reasonable doubt exists as to Buyer's financial condition, Seller may, at any time and without prejudice to any other remedies, suspend or terminate performance of any order, decline to ship, stop any material in transit, or require full or partial payment by Seller in advance.

3. **DELIVERY.** Any delivery or promise date indicated on the Sales Order is an estimate of the date Seller believes the products will be available for delivery provided, however, Seller shall not be responsible for any delays in delivery.

4. WARRANTY.

a. **Limited Warranty; Exclusion of Third Party Components.** Subject to the terms, conditions and limitations contained herein, Seller warrants only to the original Buyer that (a) Seller's new equipment products and Seller's new component products will not fail to operate in accordance with their respective specifications due to defects in material or workmanship during the period which ends two (2) years from the date of delivery, normal wear and tear excluded, and (b) Seller's new equipment products will not incur a failure of their respective structural components (i.e., trusses) due to defects in material or workmanship at any time during the period which ends five (5) years from the date of delivery, normal wear and tear excluded. The foregoing periods are sometimes referred to as "original warranty periods." The foregoing limited warranty does not apply to any part, portion or component of any product which is manufactured by a third-party ("Third-Party Component").

b. **DISCLAIMER OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY.** THE LIMITED WARRANTY SET FORTH IN THE FOREGOING PARAGRAPH IS THE SOLE AND EXCLUSIVE WARRANTY WITH RESPECT TO THE PRODUCTS. SELLER MAKES NO OTHER EXPRESS WARRANTY OF ANY KIND OR NATURE AS TO THE PRODUCTS OR THEIR PERFORMANCE EXCEPT FOR THOSE LIMITED WARRANTIES EXPRESSLY SET FORTH IN THE FOREGOING PARAGRAPH AND SPECIFICALLY DISCLAIMS ANY AND ALL REPRESENTATIONS OR WARRANTIES OF ANY KIND OR NATURE CONCERNING THE PRODUCTS, INCLUDING, BUT NOT LIMITED TO, ANY REPRESENTATION OR WARRANTY THAT THE PRODUCTS COMPLY WITH ANY LAW, RULE OR REGULATION. SELLER MAKES NO WARRANTIES WITH RESPECT TO ANY THIRD PARTY COMPONENT AND SELLER SPECIFICALLY SELLS SUCH THIRD-PARTY COMPONENTS "AS IS" WITHOUT ANY WARRANTY. FURTHER, SELLER MAKES NO IMPLIED WARRANTY OF ANY KIND OR NATURE WITH RESPECT TO ITS PRODUCTS OR ANY THIRD-PARTY COMPONENT AND SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, ANY AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR COMPLIANCE WITH ANY FEDERAL, STATE OR LOCAL LAW, RULE OR REGULATION. IN ADDITION, SELLER EXPRESSLY DISCLAIMS TO THE FULLEST EXTENT ALLOWED BY LAW, RULE OR REGULATION ANY WARRANTY PROVIDED UNDER ANY FEDERAL, STATE OR LOCAL LAW, RULE OR REGULATION.

c. **Terms and Conditions of Warranty; Voiding of Warranty; Notice Requirements.** The limited warranties set forth above shall be null and void if (a) any alterations or modifications are made to a product, (b) a product is not maintained in strict compliance with the maintenance requirements set forth in the maintenance manual for such product or otherwise provided to Buyer of such product, (c) any repairs are made to a product which are not authorized by Seller in writing, (d) any failure of a product to comply with the above limited warranty is not reported to Seller in writing within thirty (30) days of the date such failure first occurs, (e) a product is operated after the failure of any warranty first occurs, (f) a product is used for any purpose other than for the purpose for which it was manufactured, (g) a product is not operated in strict compliance with the terms and conditions set forth in any operating manual for the product (including but not limited to exceeding the load bearing capacity of the product), (h) a product is abused or damaged, (i) Buyer fails to deliver the product to Seller for inspection and testing if requested by Seller or Buyer disposes of the product or any part or component on or before the sixtieth (60th) day after sending a written claim under the warranty to Seller, or (j) such failure of the limited warranty results from a failure of any Third-Party Component.

d. **Course of Dealing; Course of Performance; Usage of Trade.** No course of dealing or course of performance of Seller with respect to the products sold under this Contract or with respect to any of its products to whomever sold and no usage of trade shall be considered in interpreting this Contract or any part thereof and none of the foregoing shall be considered a waiver or modification of any such terms, conditions, disclaimers or limitation of the limited warranties or disclaimers contained in this Contract. No statement, whether written or oral, made by any employee, sales person, distributor, agent or contractor of Seller which is not set forth in this Contract shall be considered a representation or warranty with respect to any product, its specifications or its performance and all such statements are hereby disclaimed.

e. **Exclusive Remedies for Breach of Warranty.** The sole and exclusive remedy for any failure of any product to comply with the limited warranty set forth above or any other warranty imposed upon Seller by law, if any, shall, at the election of Seller, in its sole discretion, be either (a) the repair or replacement of the product or component which failed to comply with such warranty or (b) the refund of the purchase price of the product. Buyer is responsible for all labor costs in connection with the repair or replacement of any equipment or component product; however, Seller will be responsible for its own labor performed in connection with any repair of equipment products at Seller's location. Except as provided below, any repair or replacement shall carry the same warranty as the original product but only for the remainder of the original warranty period.

Buyer's exclusive remedy with respect to any claim arising out of or as a result of Third-Party Component shall be against the third-party manufacturer.

TERMS AND CONDITIONS

f. **Warranty Claims; Notice Requirement; Limited Time to Bring Claims.** Any and all claims under the above limited warranty shall be made to Seller only in writing and not later than thirty (30) days after the date the product first fails to comply with the above limited warranty but in no event later than the expiration of the original warranty period with respect to which the claim is being made. Any claim under the above limited warranty made after such period for making a claim shall be null and void. After receiving written notice of the warranty claim, Seller shall determine whether to (a) repair or replace the product or part or (b) refund the purchase price of the product. Seller may require Buyer to return any product or part thereof which Buyer claims to be defective to Seller at Buyer's cost for inspection as a condition to any claim under the above limited warranty. No product or part may be returned to Seller without Seller's prior written authorization. If a product which is returned is determined by Seller in its sole discretion not to have failed to comply with the limited warranty, Buyer shall pay costs of removal, repair and/or replacement for such product. If a product which is returned is determined by Seller in its sole discretion to have failed to comply with the limited warranty, Seller shall pay for all repair and/or replacement costs for such product (or refund the purchase price if so elected by Seller) and Seller shall reimburse Buyer for the reasonable costs of shipping the product or component to Seller.

g. **Limitation on Liability for Breach of Warranty and Other Claims.** If the warranty and the remedy for any failure of any product to comply with any warranty are deemed for any reason to fail their intended purpose, Seller's liability for any failure of any product to comply with any such warranty, together with any and all other liability, if any, arising out of or in connection with such product, including, but not limited to, all claims, whether in contract, tort, or otherwise, arising out of, connected with, or resulting from the manufacture, sale, delivery, resale, repair, replacement, or use of the product, shall not exceed the purchase price for such product. In no event shall Seller be responsible or liable to Buyer or any third party under any circumstances for any indirect, consequential, special, punitive or exemplary, damages or losses, including, but not limited to, damages for loss of profits, goodwill, use of the product or any other equipment or other intangible losses which may be incurred in connection with the product regardless of the type of claim or the nature of the cause of action, even if Seller has been advised of the possibility of such damage or loss. Any and all claims that Buyer has against Seller, whether or not Buyer is aware of such claims, must be brought by Buyer within thirty (30) days after the date that such claim first arose, but in any event within the applicable warranty period set forth above. Any claim not brought by Buyer within the applicable thirty (30) day period shall be deemed null and void.

5. **INDEMNIFICATION.** Buyer will indemnify and hold harmless Seller, its affiliates and their respective officers, directors, employees, agents and other representatives and defend any action brought against same with respect to any claims, judgments, actions, suits, demands, damages, liabilities, costs or expenses (including, but not limited to, reasonable attorneys' fees and legal expenses) associated with or arising from the ownership, use or operation of the products by Buyer or any third party, including without limitation, product liability, an international, federal or state occupational safety and health statute, or any other governmental regulations or laws.

6. **TERMINATION OF PERFORMANCE.** Buyer may cancel its order only with the written consent of Seller and upon terms that will indemnify Seller from any loss, damage and expense arising from such cancellation. Seller may terminate this Contract pursuant to Sections 2 and/or 11 hereof, and in such event, Seller shall have no further liability to produce or ship any products hereunder and shall have no liability for damages to Buyer or any third party.

7. **TECHNICAL ADVICE.** No obligation or liability shall arise out of Seller's rendering of technical advice in connection with Buyer's order of products. Any technical advice furnished, or recommendation made by Seller or any employee or representative of Seller, concerning any use or application of any products or parts furnished under this Contract is believed to be reliable, but Seller makes no warranty, express or implied, of results to be obtained. Buyer assumes all responsibility for loss or damage resulting from the handling or use of any such products or parts in accordance with such technical advice or recommendation. The selection of the products ordered, or design of any custom products, shall be Buyer's sole and ultimate responsibility, and Seller shall have no liability whatsoever for any design defects of custom products, or if the products ordered are unsuitable for Buyer's intended use. Any advice or assistance provided by Seller to Buyer in connection with Buyer's selection or design of the products is at Buyer's risk, and Seller makes no representation or warranty whatsoever in connection with such advice or assistance.

8. **ASSIGNMENT.** Buyer shall not assign its rights or obligations under this Contract without the prior written consent of Seller, which consent may be withheld for any reason in the sole discretion of Seller. Any attempt at such assignment by Buyer without the prior written consent of Seller shall be deemed null and void. This Contract will be binding upon the parties hereto, and their successors and permitted assigns.

9. **SECURITY INTEREST OF SELLER.** Title to the products will not pass to Buyer until all required payments have been made to Seller. Until the purchase price and all other applicable costs and expenses are paid in full, Seller reserves a purchase money security interest in the products and the proceeds therefrom, and Seller thereby possesses the rights of a secured party under the Uniform Commercial Code. Upon Seller's request, Buyer shall execute all necessary financing statements and other documents evidencing this security interest with the appropriate state and local authorities. Seller is entitled to and is hereby granted reasonable access to Buyer's locations as necessary to exercise its remedies as a secured party.

10. **GOVERNING LAW.** This Contract shall be construed, interpreted, and governed by the laws of the State of Minnesota without regard to its conflict of laws principles. The exclusive forum for any disputes arising out of or relating to this Contract shall be any federal or state court sitting in the State of Minnesota. The parties irrevocably consent to such exclusive jurisdiction in such courts and to the proper venue therein.

11. **FORCE MAJEURE.** Seller does not assume the risk of and shall not be liable for failure to perform any obligation relating to the products caused by civil insurrection, war, fire, strike, labor stoppages or other labor disturbances, acts of God, acts or omissions of Buyer, acts or omissions of the United States Government, floods, epidemics, freight embargoes, shortages of fuel, energy or materials, failure of suppliers or subcontractors to satisfactorily meet scheduled deliveries, or any other cause beyond the reasonable commercial control of Seller.

TERMS AND CONDITIONS

12. **NOTICES.** Any notices, consents or other communications required or permitted under this Contract must be in writing and delivered personally, overnight air courier, registered or certified mail or facsimile. Unless otherwise stated in this Contract, notices, consents or other communication will be deemed received (a) on the date delivered, if delivered personally or by facsimile transmission; (b) on the next business day if sent via overnight air courier; or (c) three (3) business days after being sent, if sent by registered or certified mail.

13. **SEVERABILITY; WAIVER.** The invalidity or unenforceability of any provision of this Contract shall not affect the validity or enforceability of any other provision of this Contract. No waiver of any of the provisions of this Contract shall be deemed, or shall constitute a waiver of any other provision, whether or not similar, nor shall any waiver constitute a continuing waiver. No waiver shall be binding unless executed in writing by the party making the waiver. The Section headings included herein are for the convenience of the parties only and in no way alter, modify, amend, limit or restrict the contractual obligations of the parties.

14. **NO THIRD-PARTY BENEFICIARIES; SETOFF.** Nothing in this Contract is intended to, or shall, create any third-party beneficiaries, whether intended or incidental, and neither party shall make any representations to the contrary. Seller shall have the right to deduct from any sums it owes to Buyer, any sums or the value of any obligation owed by Buyer to Seller.

15. **ENTIRE AGREEMENT.** The terms set forth herein constitute the sole terms and conditions of the Contract between Buyer and Seller. Notwithstanding the foregoing or any other term of this Contract, to the extent this Contract conflicts with the terms or conditions of any written distributor agreement between the parties, the written distributor agreement shall control. No other warranty, term, condition or understanding, whether oral or written shall be binding upon Seller, unless hereafter expressed in writing, approved and signed by Seller.

16. **SURVIVAL.** The provisions of Sections 3, 4, 5, and 7 through 16 shall survive the termination and performance of this Contract.



NATIONAL STONE, SAND & GRAVEL ASSOCIATION



Natural building blocks for quality of life



Superior's welds are certified by the
American Welding Society



PULLEY & TAKE-UP CATALOG

PULLEYS

Product Range and Capabilities

Pulley Part Number System

Bushing Systems / Hub Design Options

XT® and QD® Bushing Specs

Bushing Location Dimensions

Conveyor Design Data Sheet

Conveyor Profiles

Drive Pulley Shaft Detail Worksheet

Non-Drive Pulley Assembly Details

Core Systems® Pulley Data Sheet

Pulley Diameter Selection Chart

Lagging

Chevron® Pulley

Grain Elevator Pulleys

Core Systems® Design

Specialized Pulleys

TAKE-UPS

Conveyor Take-Up Frames

Telescoping Tube Take-Up

Wide Slot Take-Up

Light Duty Take-Up

Heavy Duty Take-Up

Top Angle Take-Up

Center Pull Take-Up

Take-Up Interchange and Bearing Sizes

APPENDIX

Bushing Installation – * XT®

Bushing Installation – * QD®

Bushing Maintenance and Removal

Pulley Stress Contributors

Shaft Weights and Ordering Info

Shaft Formulas

Lagging Weights

Bulk Materials and Belt Speeds

Volumes of Stockpile Volume Calculator

Lift Based on Actual Pulley Center to Center

Conveyor Horsepower Information

Electrical Information

Conveyor Belt Troubleshooting Guide

Conveyor Belt Speeds

Terms and Conditions

1-800-437-9074 | SUPERIOR-IND.COM